


MODEL BDA



HIGHLIGHTS

- The damper is installed by sliding between two ducts
- Capable of functioning in both horizontal and vertical positions
- Galvanized steel round back draft damper with aluminum blades for mounting between ducts
- When mounted, damper prevents back draft when the fan stops; temperature usage up to +50°C
- Aluminum blades will open when blades are exposed to pressure and will shut again when pressure drops
- Its mechanical spring is sealed with a rubber (neoprene) gasket, which helps opening and shutting of the aluminum blades

SPECIFICATIONS

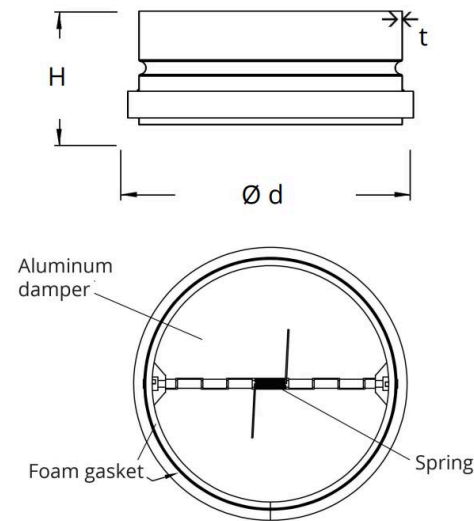

Model	Ø d	H	t
BDA 4"	3-7/8" (99mm)	3-7/16" (88mm)	1/64" (0.5mm)
BDA 5"	4-7/8" (124mm)		
BDA 6"	5-7/8" (149mm)		
BDA 8"	7-13/16" (199mm)		
BDA 10"	9-13/16" (249mm)	5-1/16" (128mm)	
BDA 12"	12-3/8" (314mm)	5-1/16" (128mm)	

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.