

LED Slim Lights

MODEL SLIM4DGR-5CCT



HIGHLIGHTS

- 4" 5 adjustable CCT round regress anti-glare slim gimbal light
- 38° wide beam with 30° tilt and 360° rotation
- Class 2 transformer in junction box is included
- No housing required — Type IC, air tight & damp location rated
- Easy & fast installation — install directly into ceiling with clips

MOUNTING

- Ceiling clearance required: > 2-3/4"
- Cut hole in ceiling and snap fixture in Opening with attached spring clips

SPECIFICATIONS

Model	SLIM4DGR-5CCT
Wattage	12W
Voltage	120V AC
Lumens	900 lmn
Beam Angle	38°
Lifetime	50000 hours
Cutout	Ø 4-1/4" (108 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated / Indoor use / for Damp location
Grade of Protection	IP 44
Air Tight	Yes
Application	Recessed ceiling / Halls / Home / Office / Store / Cafe
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Operating Temp.	-20°C ~ +40°C
Warranty	5 years

COLOUR AVAILABILITY




SLIM4DGR-5CCT WH
(white)



SLIM4DGR-5CCT BK
(black)

DIMENSIONS

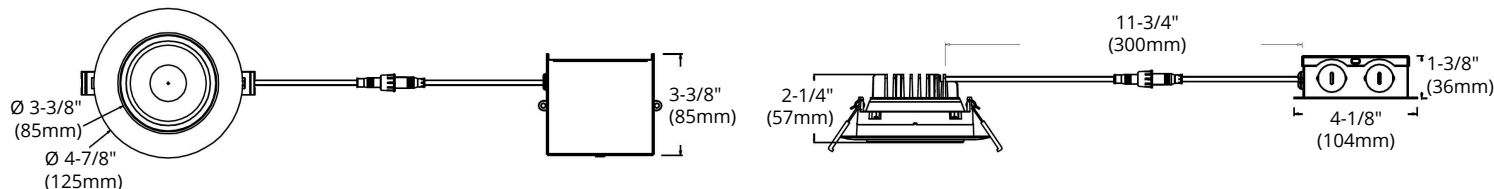

ACCESSORIES (SOLD SEPARATELY)



PLATE4-HB

Mounting Plate for ORTECH 4" Slim Lights



PLATE26-4

New Construction Plate for ORTECH 4" Slim Lights



CORD-12/24/60/120/240

Flexible Connector
2FT/5FT/10FT/20FT

COMPATIBLE DIMMER LIST & FEATURES / BENEFITS

BRAND	FAMILY	MODEL
LUTRON	SKLARK CONTOUR	CTCL-153P
		DVCL-153PDH
		CT-600P
LEVITON	DIVA	DVCL-153P
		6672
PASS & SEYMOUR	DECORA	6674
		HARMONY



5CCT CHANGEABLE

Changeable
2700K/3000K/3500K/
4000K/5000K controlled
by 5CCT switch

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.