




HIGHLIGHTS

- Ventilating fan should be ceiling mounted and capable of exhausting air quietly and efficiently
- It comes with a DC motor which is known for its high efficiency and long lasting reliability
- It holds an ETL evaluation

SPECIFICATIONS


Model	ODD-400		ODD-500	
Static Pressure in inches w.g.	0.1	0.25	0.1	0.25
Air Volume (CFM)	400	390	500	480
Noise (sones)	3.2	3.0	4.0	N/A
Fan Watts	40W		59W	
Duct Diameter	8"			
Power Rating (V/Hz)	120/60			

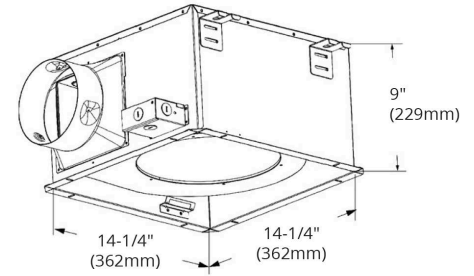

- **Housing Size:** 14-1/4" x 14-1/4" x 9" (362 mm x 362 mm x 229 mm)
- **Grille Dimensions:** 17-1/4" x 17-3/4" (438 mm x 451 mm)
- **Fan Weight:** 21.8 lb

HOUSING

- Made of rugged 26 GA galvanized steel
- 8" diameter metal duct which included a light weight built-in backdraft damper

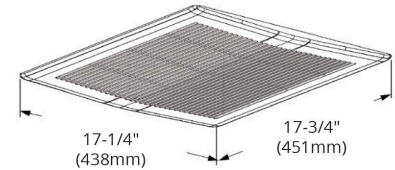

MOTOR / BLOWER

- Plug in permanently lubricated motor — Engineered for continuous operation
- Totally enclosed brushless DC motor designed to operate continuously
- Power rating should be 120V and 60Hz
- Fan shall be ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit
- Motor comes with a built-in overload disconnect for safety and longer motor life
- Our Premium series operates at lower RPM's to give you quieter operation
- Metal Blower



Comes with protective cardboard cover

Warranty is voided if the cardboard is removed anytime during construction.

GRILLE

- Made of a rugged polymeric resin that is known for its long life durability

TYPICAL SPECIFICATIONS

- Ceiling ventilator shall have corrosion resistance galvanized steel housing with 4 point mounting capability
- It shall be ducted to a roof vent or wall cap using 8 inch round pipe
- Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: