

MODEL ODD22025

Ultra Silent, High Performance, Attractive Design Grille
Description

Ventilating fan should be ceiling mounted and capable of exhausting air quietly and efficiently.

It comes with a DC motor which is known for its high efficiency and long lasting reliability. It holds an ETL evaluation.

This fan has a unique plug and play concept that allows you to to add accessories such as motion sensor, humidistat, light without changing the fan.

Housing

Made of rugged 26 GA galvanized steel

6" diameter duct which includes a light weight built-in backdraft damper.

Double hanger bar mounting brackets that are adjustable up to 26 inch span allows for ideal positioning.

Motor/Blower

Plug in permanently lubricated motor- Engineered for continuous operation.

The motor is energy efficient for continuous duty operation.

Power rating should be 120 volts and 60 Hz

Fan shall be ETL and cETLus listed for tub/shower enclosure when used with a GFCI branch circuit.

Motor comes with a built in overload disconnect for safety and longer motor life.

Our Premium series operates at lower RPM's to give you quieter operation.

Grille

Made of a rugged polymeric resin that's known for its long life durability.

Comes with torsion spring clips that helps mount grille evenly.

Typical specification

Ceiling ventilator shall have corrosion resistance galvanized steel housing with 4 point mounting capability.

It shall be ducted to a roof vent or wall cap using 6 inch round pipe.

Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.

Ortech ventilators come with permanent split capacitor motor which improves efficiency.






Optional
Humidistat
Motion Sensor
Speed controller
Metal Grille

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS



Model Number	ODD22025	
Static Pressure in inches w.g.	0.1	0.25
Air Volume (CFM)	220	195
Noise (sones)	2.5	N/A
Fan Watts	31W	
Duct Diameter	6"	
Power Rating (V/Hz)	120/60	

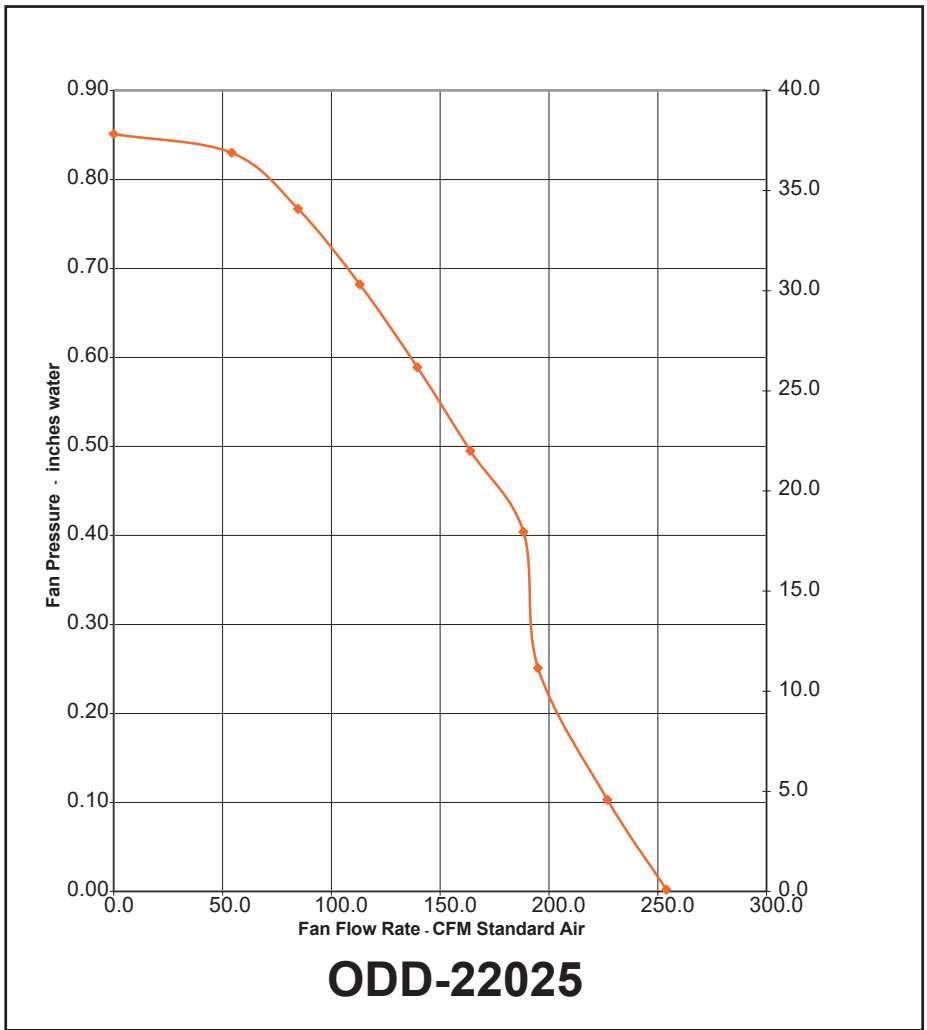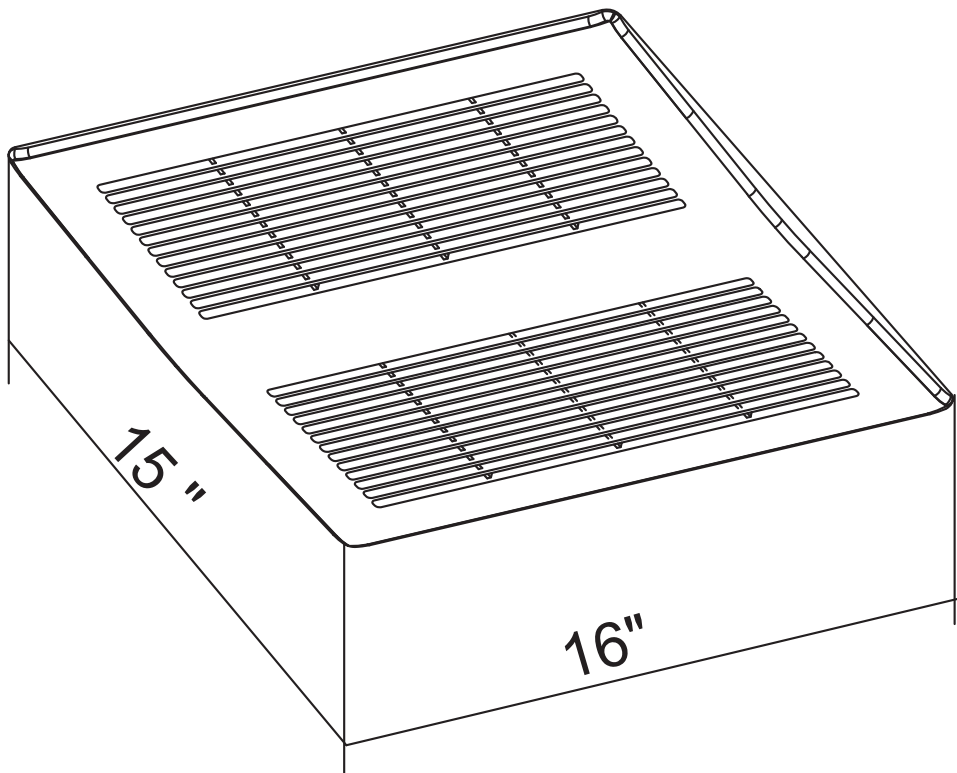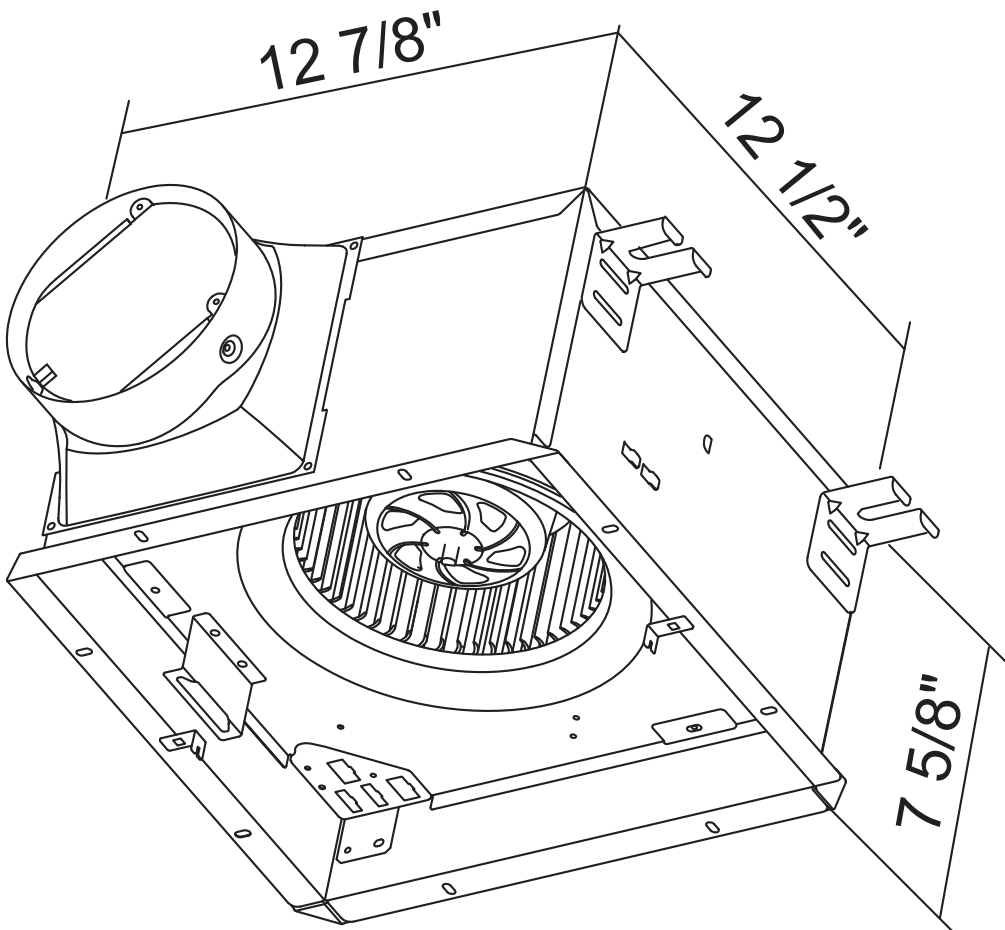

Comes with protective cardboard cover

Warranty is voided if the cardboard is removed anytime during construction.

ORTECH INDUSTRIES INC.

CERTIFICATIONS



13376 COMBER WAY
SURREY, BC, V3W 5V9
CANADA
Phone: 1-888-543-6473