

LED FLUSH MOUNTS

2104-5CCT | 2106-5CCT | 2109-5CCT | 2112-5CCT

WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

- LED Flush Mounts are suitable for using in wet/damp locations.
- Please keep the LED Flush Mounts away from any corrosive substance, and please use dry cloth when you clean it.
- LED Flush Mounts can only be installed by a qualified electrician.
- Before installation or maintenance, please disconnect the power to prevent electric shock

APPLICATION NOTICE

- For your safety, this fixture **MUST** be wired in accordance to electrical codes and ordinances
- **DO NOT** open the light fixture and the side plates of driver — no serviceable part inside
- **DO NOT** use any other driver except the ones advised by the supplier
- **DO NOT** connect multiple fixtures to one driver


CAUTION

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician.

INSTALLATION GUIDE

FLUSH MOUNT

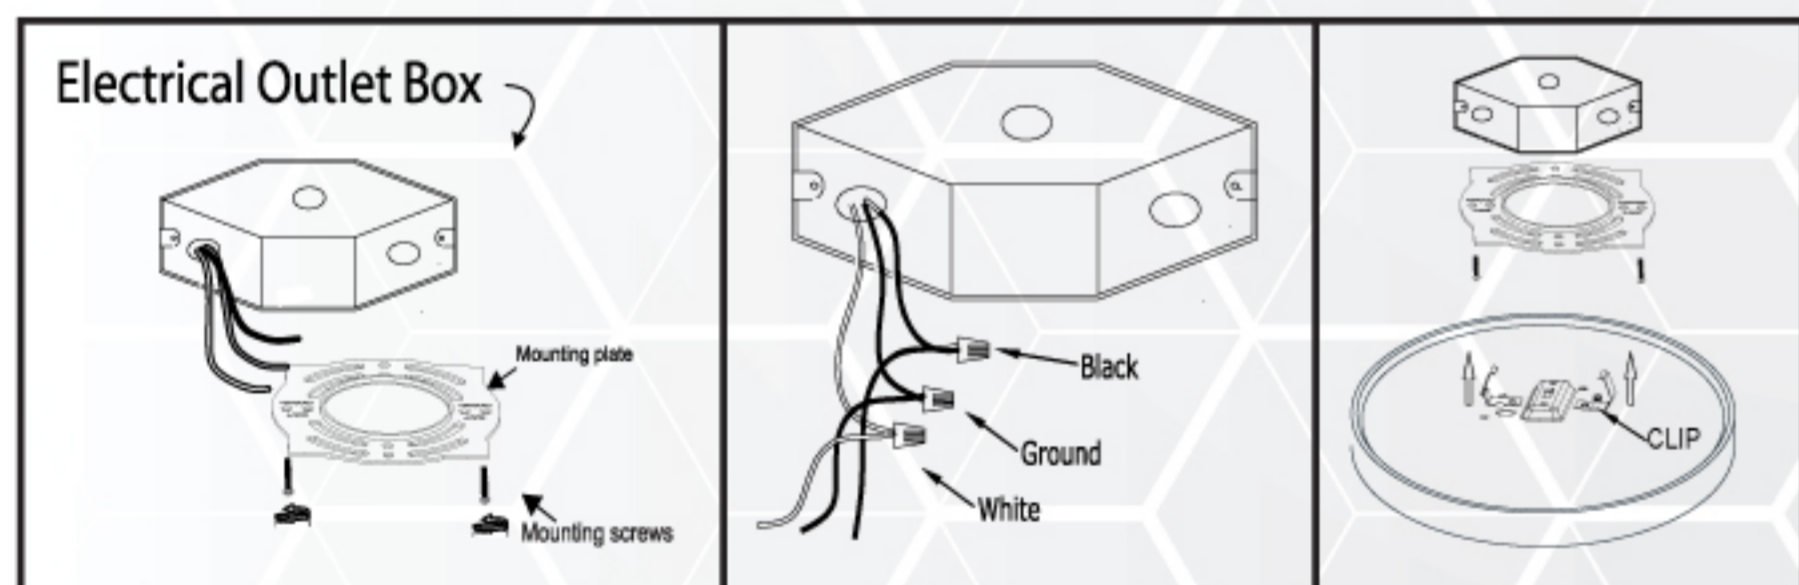


FLUSH MOUNT:

STEP 1: Prior to installation, install mounting plate into the electrical outlet box with mounting screws. Drive screws completely to the end of the junction box.

STEP 2: Connect supply wires to wires on fixture with wire nuts or push wires into Quick Connector. Connect white to white, black to black, and copper wire to copper wire as grounding connection.

STEP 3: Completing the installation by pushing the fixture into the mounting plate.

RETROFIT A RECESSED CAN

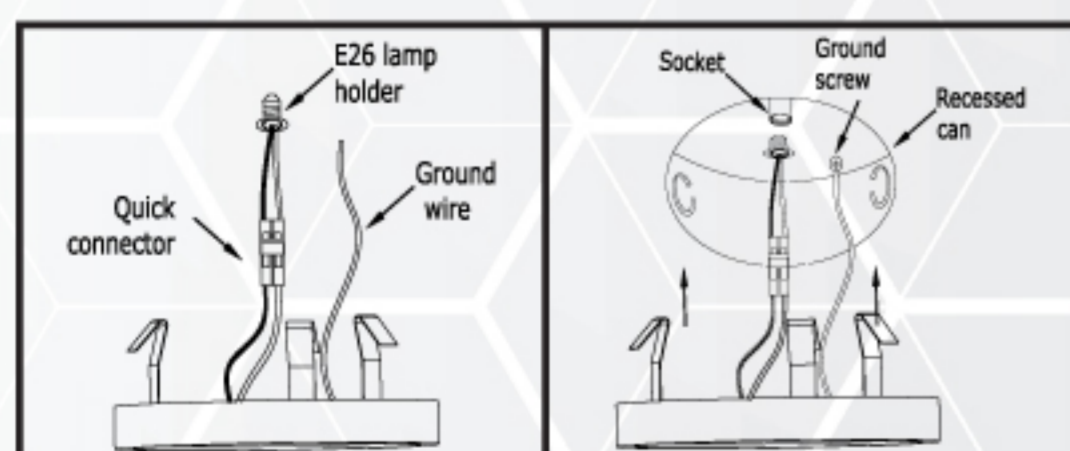

RETROFIT A RECESSED CAN:

STEP 1: Insert wires into Quick Connector. Black to black and white to white. Attach ground wire to ground screw in recessed can.

STEP 2: Turn E26 lamp holder into socket base. Connect Quick Connectors. Tuck all wires into recessed can. Squeeze springs and push up into recessed can.

