

MODEL SLIM-RG4-5CCT



HIGHLIGHTS

- 4" 5 adjustable CCT slim regress downlight
- Class 2 transformer in junction box is included
- No housing required — Type IC, air tight & damp location rated
- Easy & fast installation — install directly into ceiling with clips
- Aluminum die-cast construction with beam spread option 38°

MOUNTING

- Ceiling clearance required: > 3-1/2"
- Cut hole in ceiling and snap fixture in Opening with attached spring clips

SPECIFICATIONS

Model	SLIM-RG4-5CCT
Wattage	15W
Voltage	120V AC
Lumens	1000 lmn
Beam Angle	38°
Lifetime	50000 hours
Cutout	Ø 3-3/4" (95 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated / Indoor use / for Damp location
Grade of Protection	IP 44
Air Tight	Yes
Application	Recessed ceiling / Halls / Home / Office / Store / Cafe
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Operating Temp.	-20°C ~ +40°C
Warranty	5 years

MODEL SLIM-RG4-5CCT

INTERCHANGEABLE RINGS & REFLECTORS (SOLD SEPARATELY)



SLIM4RG-RF-ALCH
Alzek Chrome Reflector



SLIM4RG-RF-ALHZ
Alzek Haze Reflector



SLIM4RG-RF-BFWH
White Baffle Reflector



SLIM4RG-RF-BFBK
Black Baffle Reflector



SLIM4RG-RING-WH
Regular Ring White



SLIM4RG-RING-BK
Regular Ring Black

FEATURES & BENEFITS




Mix & Match interchangeable reflector & trims



5CCT CHANGEABLE

Changeable
2700K/3000K/3500K/
4000K/5000K controlled
by 5CCT switch

DIMENSIONS

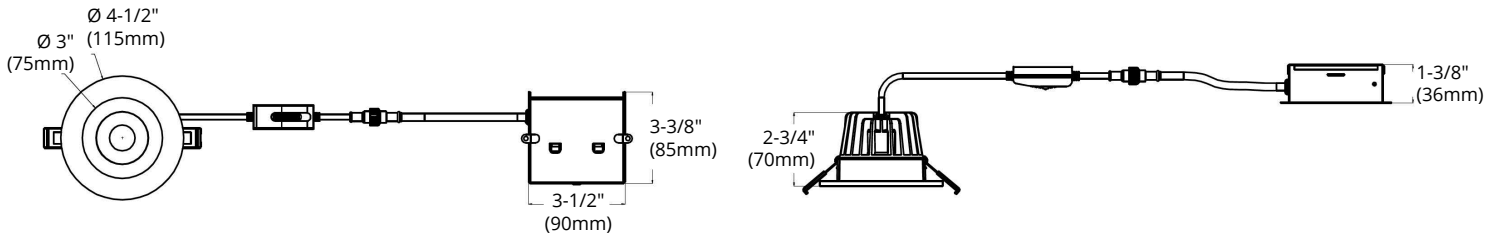

ACCESSORIES (SOLD SEPARATELY)



PLATE3A-HB

Mounting Plates for
ORTECH SLIM4RG/
SLIM-RG3/SLIM-RG4



PLATE26-3A

New Construction Plate for
ORTECH 4" Slim Lights



CORD-12/24/60/120/240

Flexible Connector
2FT/5FT/10FT/20FT

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.