

LED PANEL LIGHTS

OD-1x4-3CCT+W | OD-2x2-3CCT+W | OD-2x4-3CCT+W

HIGHLIGHTS

POWER AND CCT ADJUSTABLE PANEL LIGHTS FOR COMMERCIAL USE

- Thickness of the frame is 0.38", extremely slim and beautiful
- Using high quality aluminum frame with great heat dissipation and low light degradation
- The panel light has uniform and soft luminance, high luminous efficacy, saving energy and protecting environment
- 5 year warranty






SPECIFICATIONS

Model	OD-1x4-3CCT+W	OD-2x2-3CCT+W	OD-2x4-3CCT+W
Wattage	30W 35W 40W	30W 35W 40W	30W 40W 50W
Working Current	0.44A	0.44A	0.55A
Voltage	AC120-347V		
Beam Angle	120°		
Lifetime	50000 hours		
Dimmable	Yes(only 0-10v dimming available)		
Warranty	5 years		
Grade of Protection	IP20		
Luminous Efficiency	125lm/W		
Colour Temp.	3500K / 4000K / 5000K		
CRI	≥80		
Operating Temp.	-20°C ~ +40°C		

LED PANEL LIGHTS

OD-1x4-3CCT+W | OD-2x2-3CCT+W | OD-2x4-3CCT+W

DIMENSIONS

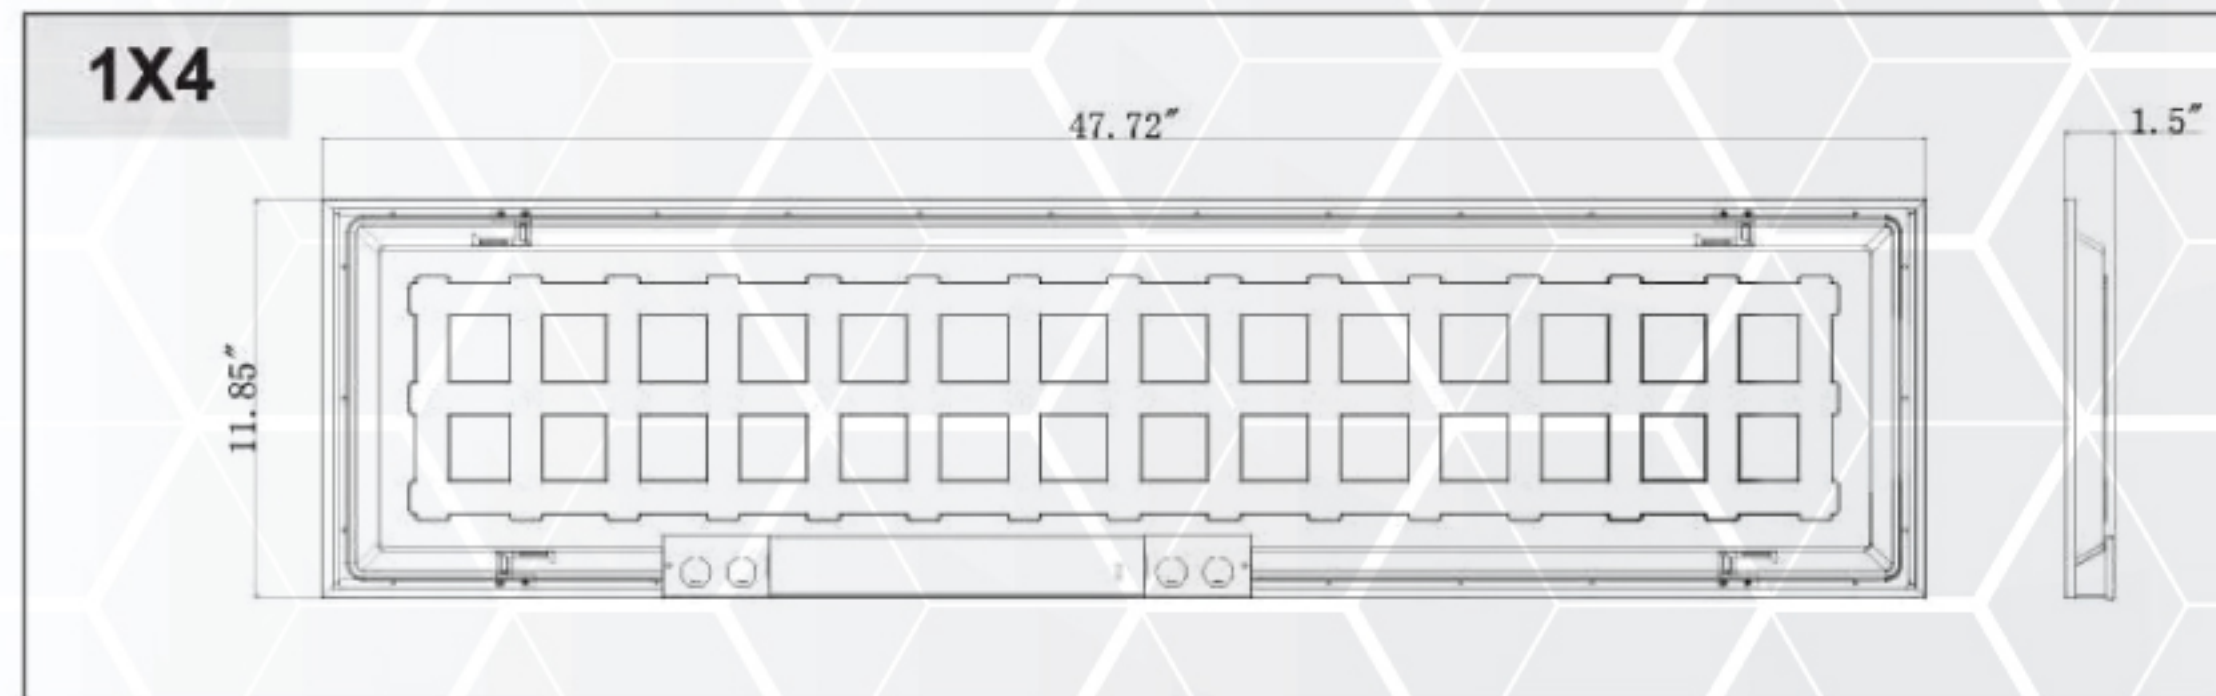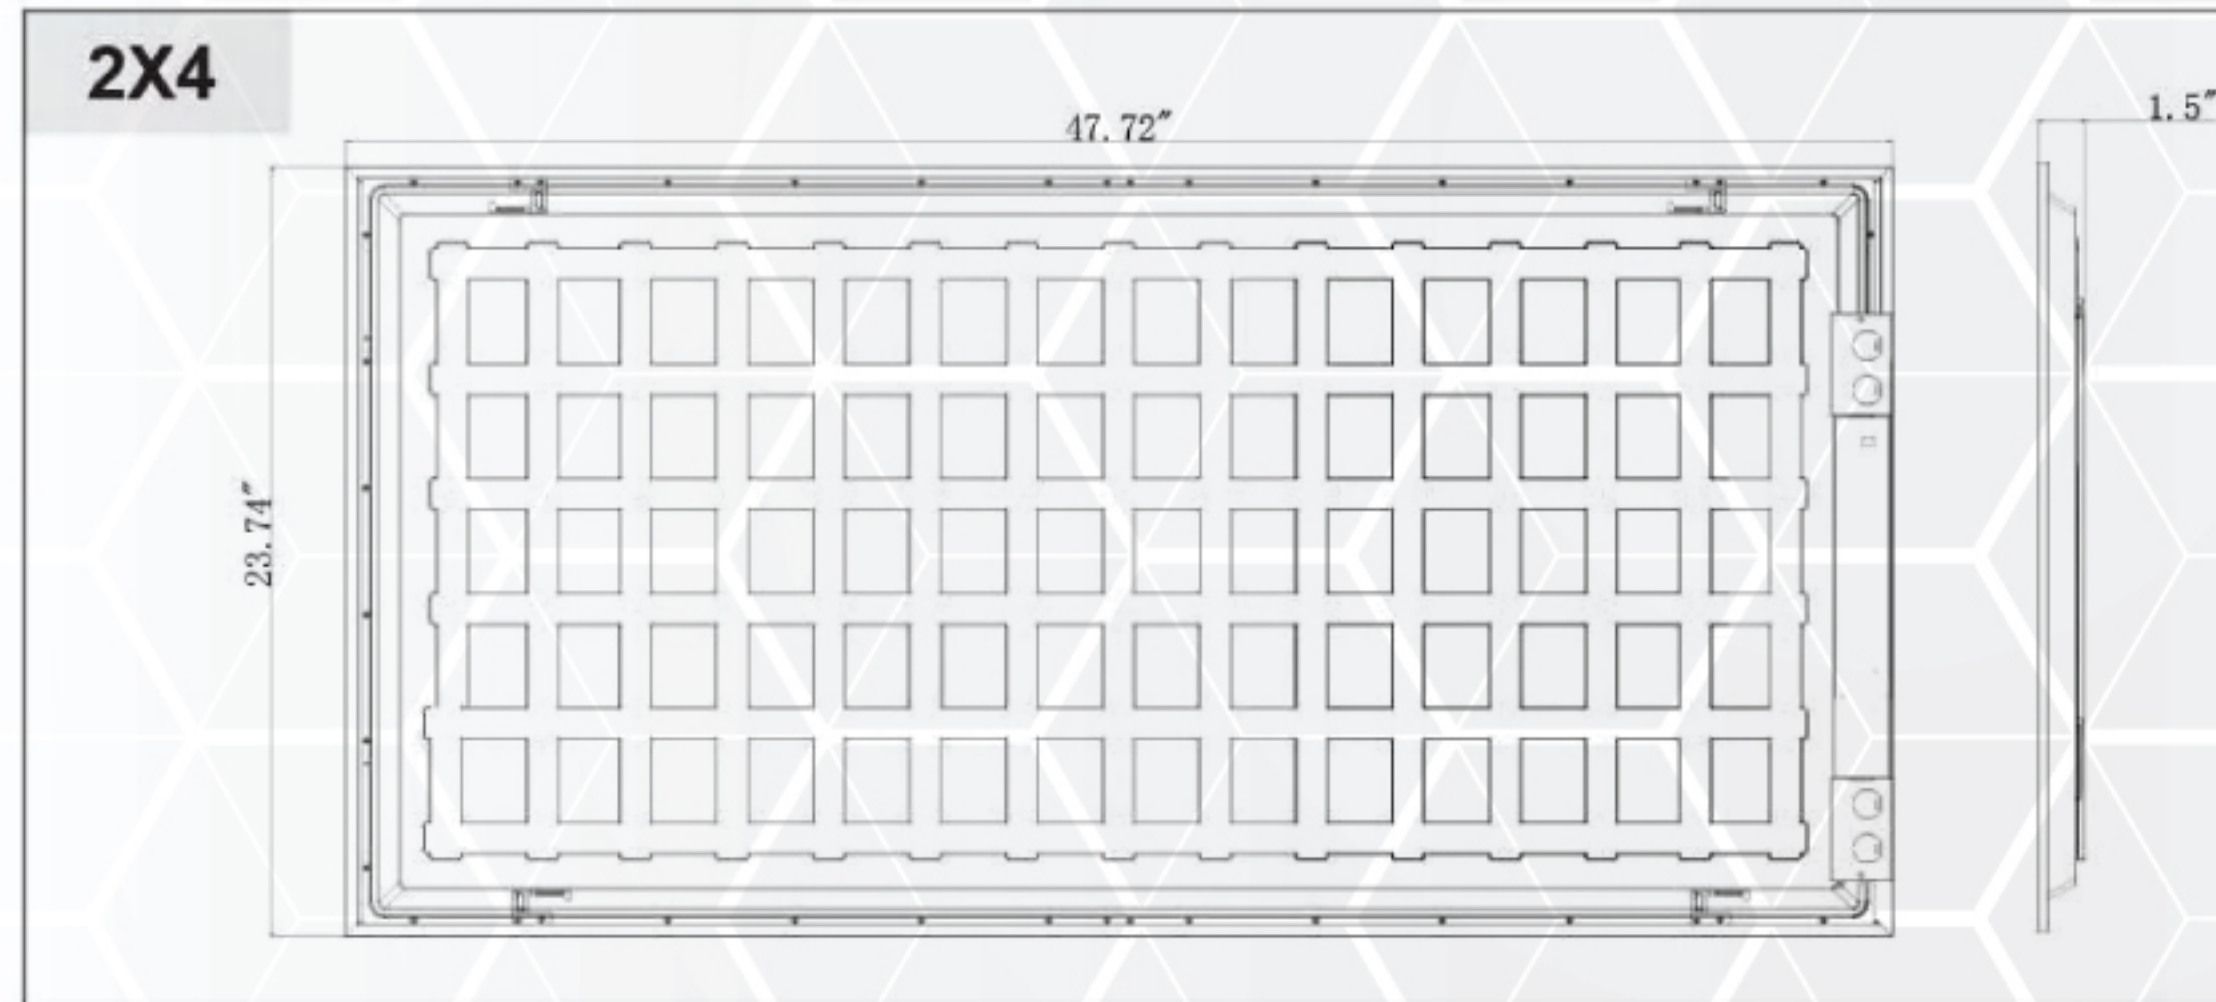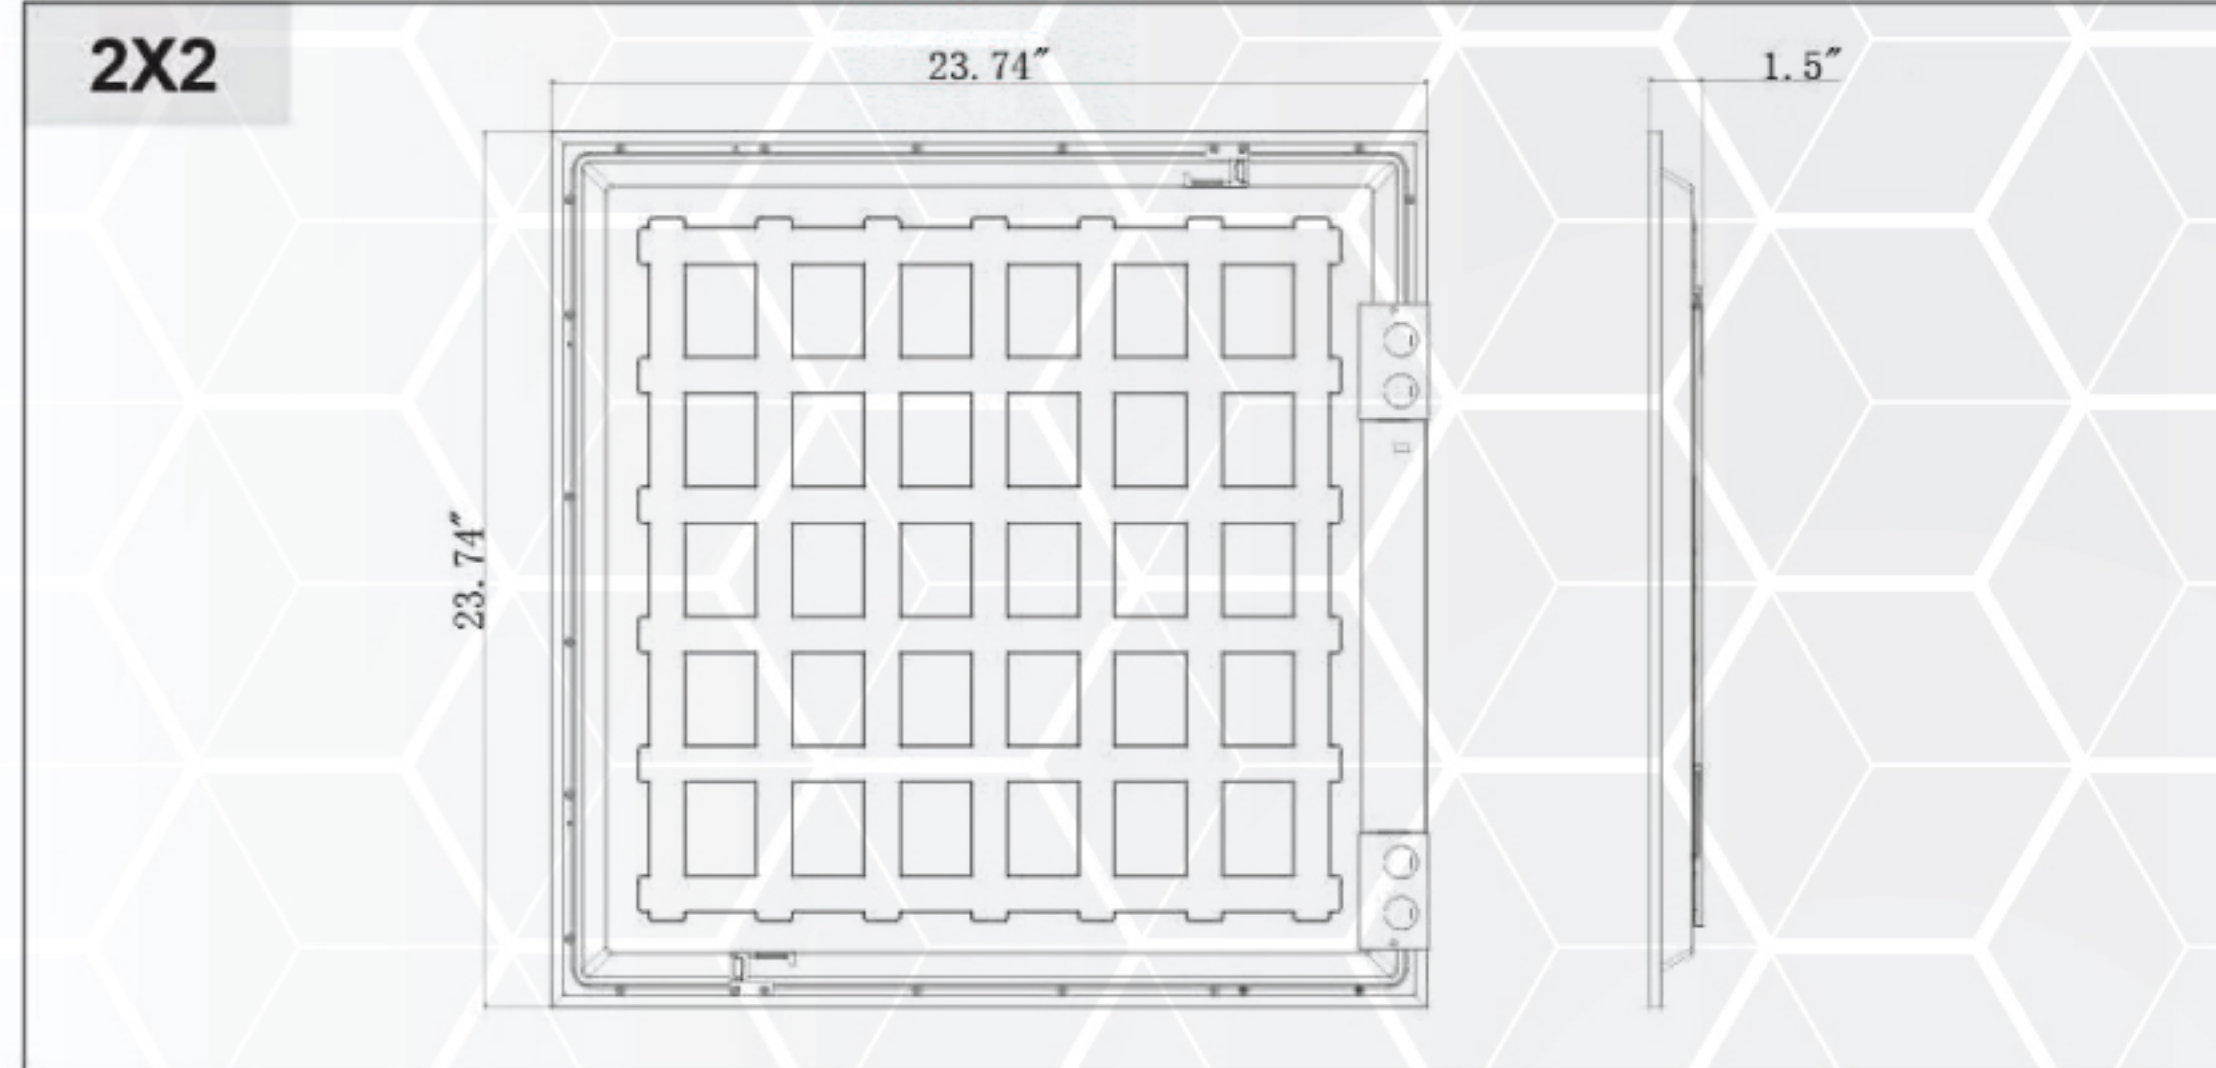

ACCESSORIES



PANEL-SUS-KIT
Length of steel cable: 1m (3.3 ft.)

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.