

LED SLIM LIGHTS

SLIM4BP-5CCT

HIGHLIGHTS

4" Slim LED Downlight - with Adjustable CCT

- Multiple installation — Recessed with Can Housing and Surface Mounted with J-Box possible
- Offers perfect LED mounting with uniform light distribution without uneven shadow
- Interchangeable magnetic rings available - white colour included in box
- Best suited to a deep 4" octagonal junction box, such as 54171-K
- Easy and fast installation — install directly into ceiling with junction box
- Five years warranty



INTERCHANGEABLE TRIMS



Magnet Glass Diffuser Durable Airtight Aluminum Body

Interchangeable Magnetic Trims for Your Option: White, Black and Brushed Nickel.

SPECIFICATIONS

Model	SLIM4BP-5CCT
Wattage	9W
Voltage	AC120V, 60Hz
Lumens	715lm
Beam Angle	110°
Lifetime	50000 hours
Dimmable	Yes
Rating	IC rated Wet locations
Grade of Protection	IP54
CRI	80Ra+
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Application	Drop ceilings / Office / Attics / Hallways / Bathrooms / Kitchens / Basements
Operating Temp.	-20°C ~ +40°C

LED SLIM LIGHTS

SLIM4BP-5CCT

DIMENSIONS




Ø4-7/8"(125mm)




1-1/8"(28mm)



INSTALLATION


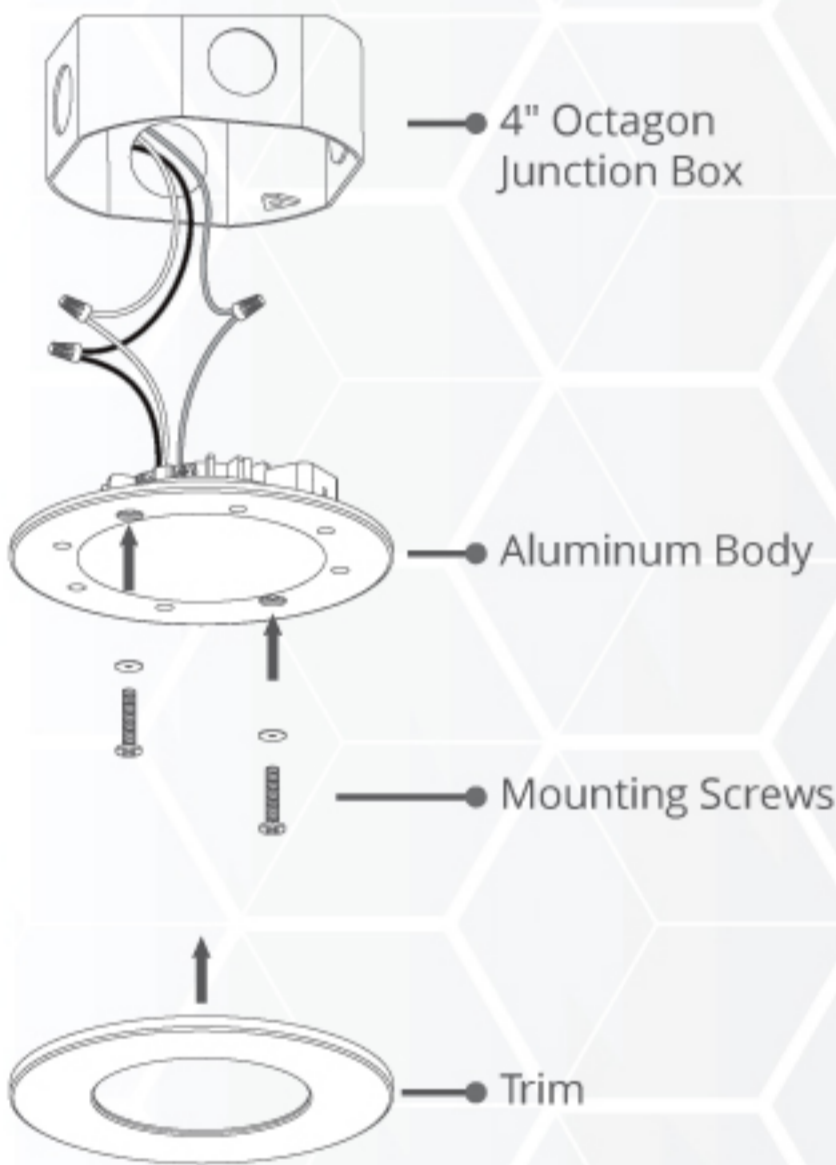


4" Octagon Junction Box

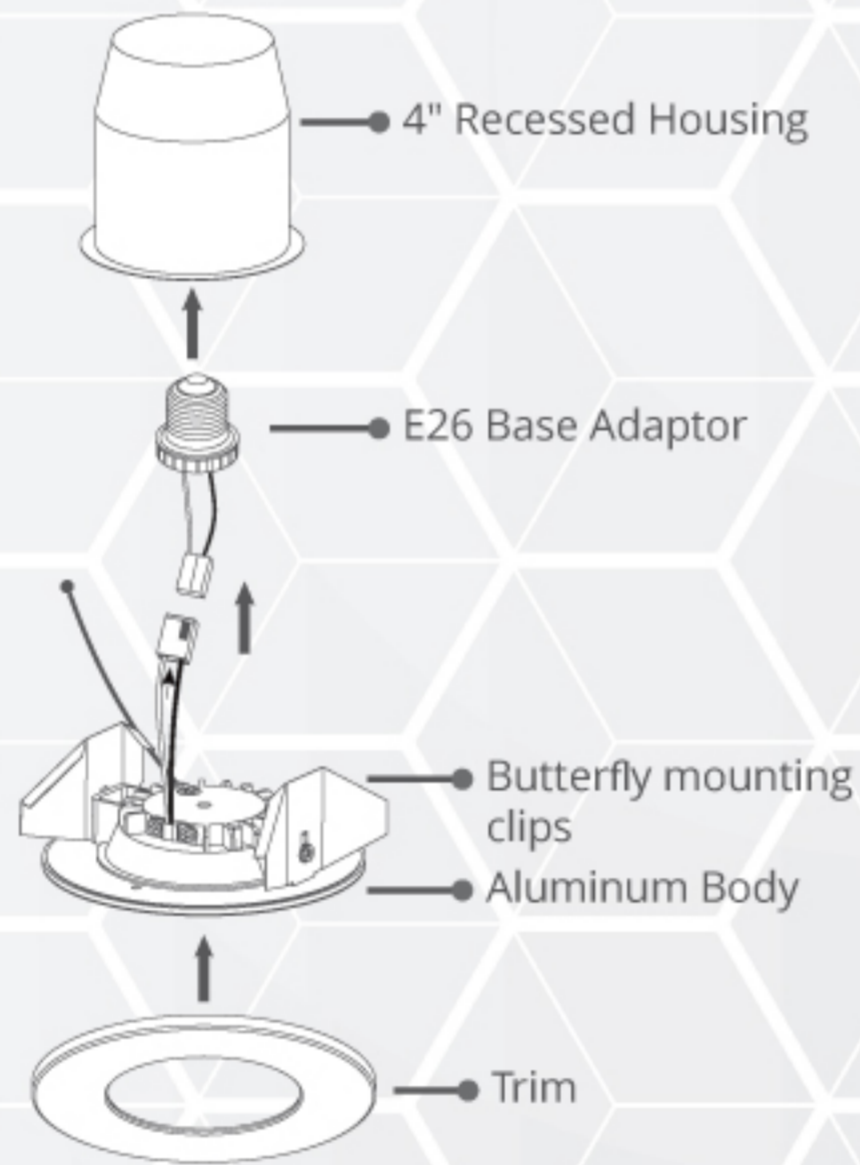

4" Recessed Housing

TESTING REPORT

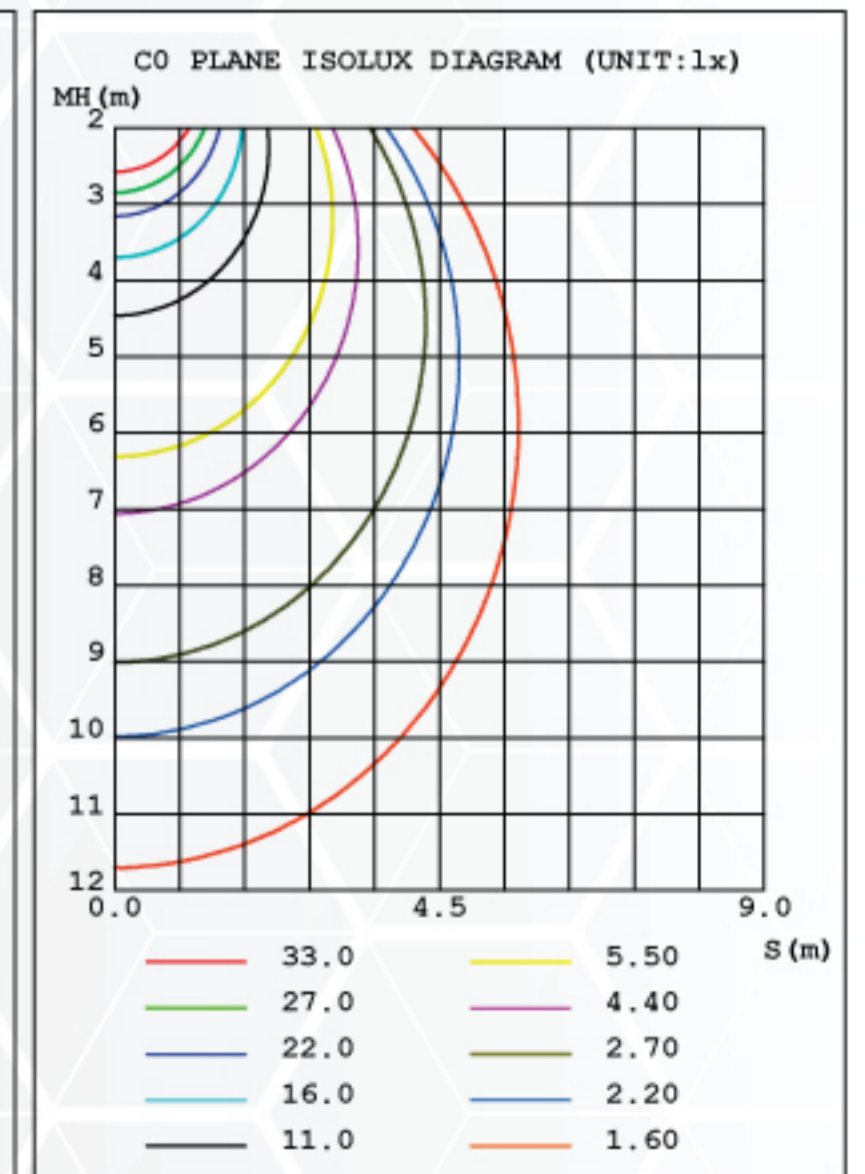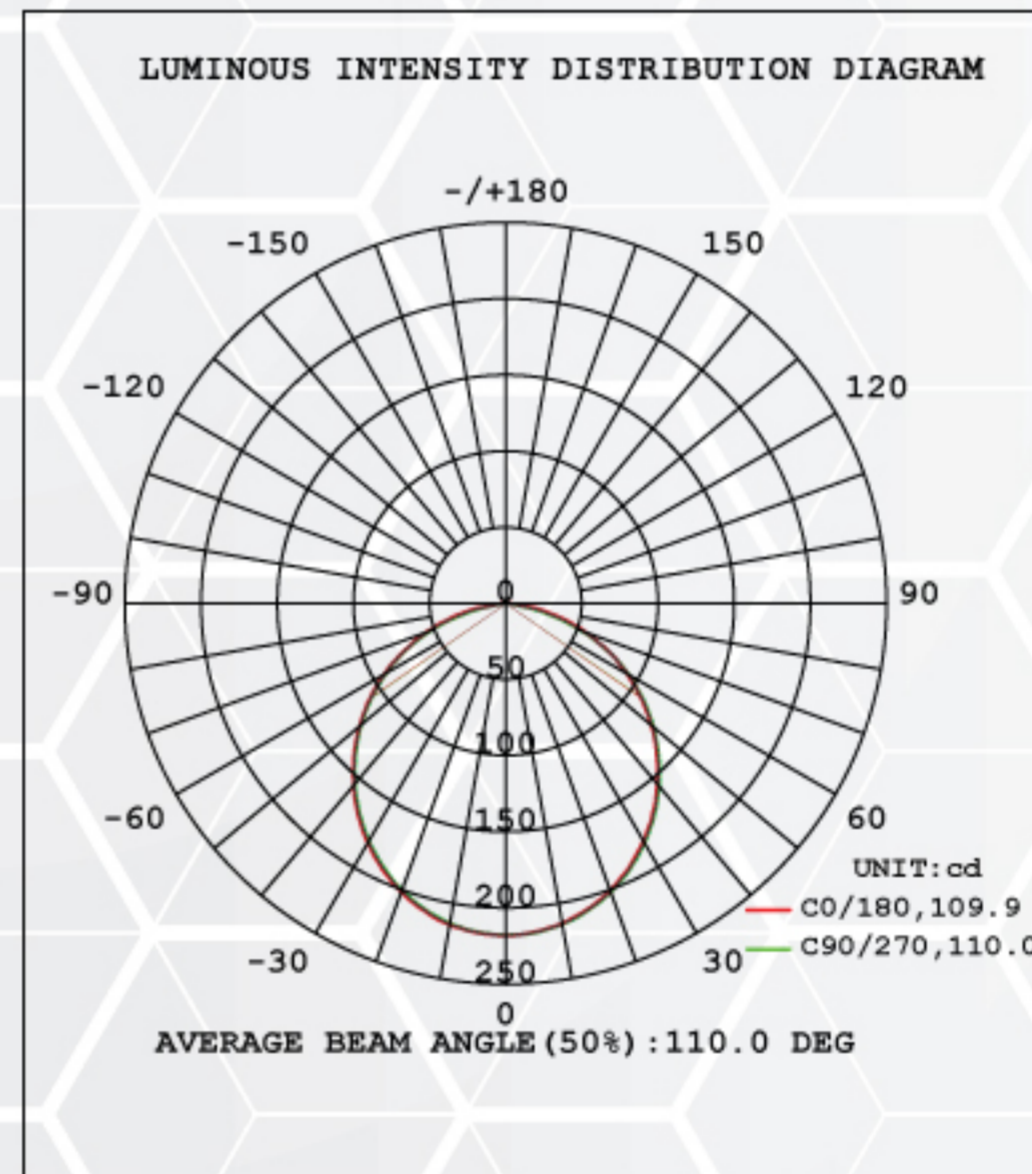

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.