

LED FLUSH MOUNTS

4110-3CCT | 4112-3CCT | 4116-3CCT

HIGHLIGHTS

Round 10", 12" & 16" LED flush mounts with backlight & adjustable CCT

- Backlight to light up the ambience
- Rotatable easy installation
- Super Slim Design
- Suitable for damp locations
- Frameless, Uniform Light Distribution (frames sold separately)



TRIMS (SOLD SEPARATELY)



SPECIFICATIONS

Model	4110-3CCT	4112-3CCT	4116-3CCT
Wattage	15W	18W	30W
Voltage	AC120V, 60Hz		
Lumens	1200lm	1440lm	2400lm
Beam Angle	120°		
Lifetime	50000 hours		
Air Tight	Yes		
Rating	IC rated Dry and damp location Indoor use		
Grade of Protection	IP54		
Size	250 x 47.5	300 x 48.5	400 x 48.5
Colour Temp.	3000K / 4000K / 5000K		
Dimming	Yes (Triac Dimming)		
Application	Corridors / Lobbies / Kitchens / Bathrooms / Bedrooms		
Operating Temp.	-20°C ~ +40°C		

LED FLUSH MOUNTS


4110-3CCT | 4112-3CCT | 4116-3CCT

LIGHTING DISTRIBUTION


- Perfect LED Mounting
- Uniform Light Distribution
- It avoids black dots and shadow on the light, un-uniform lighting, which are the headache in the LED panel field.



POLAR CURVES WIDE DISTRIBUTION

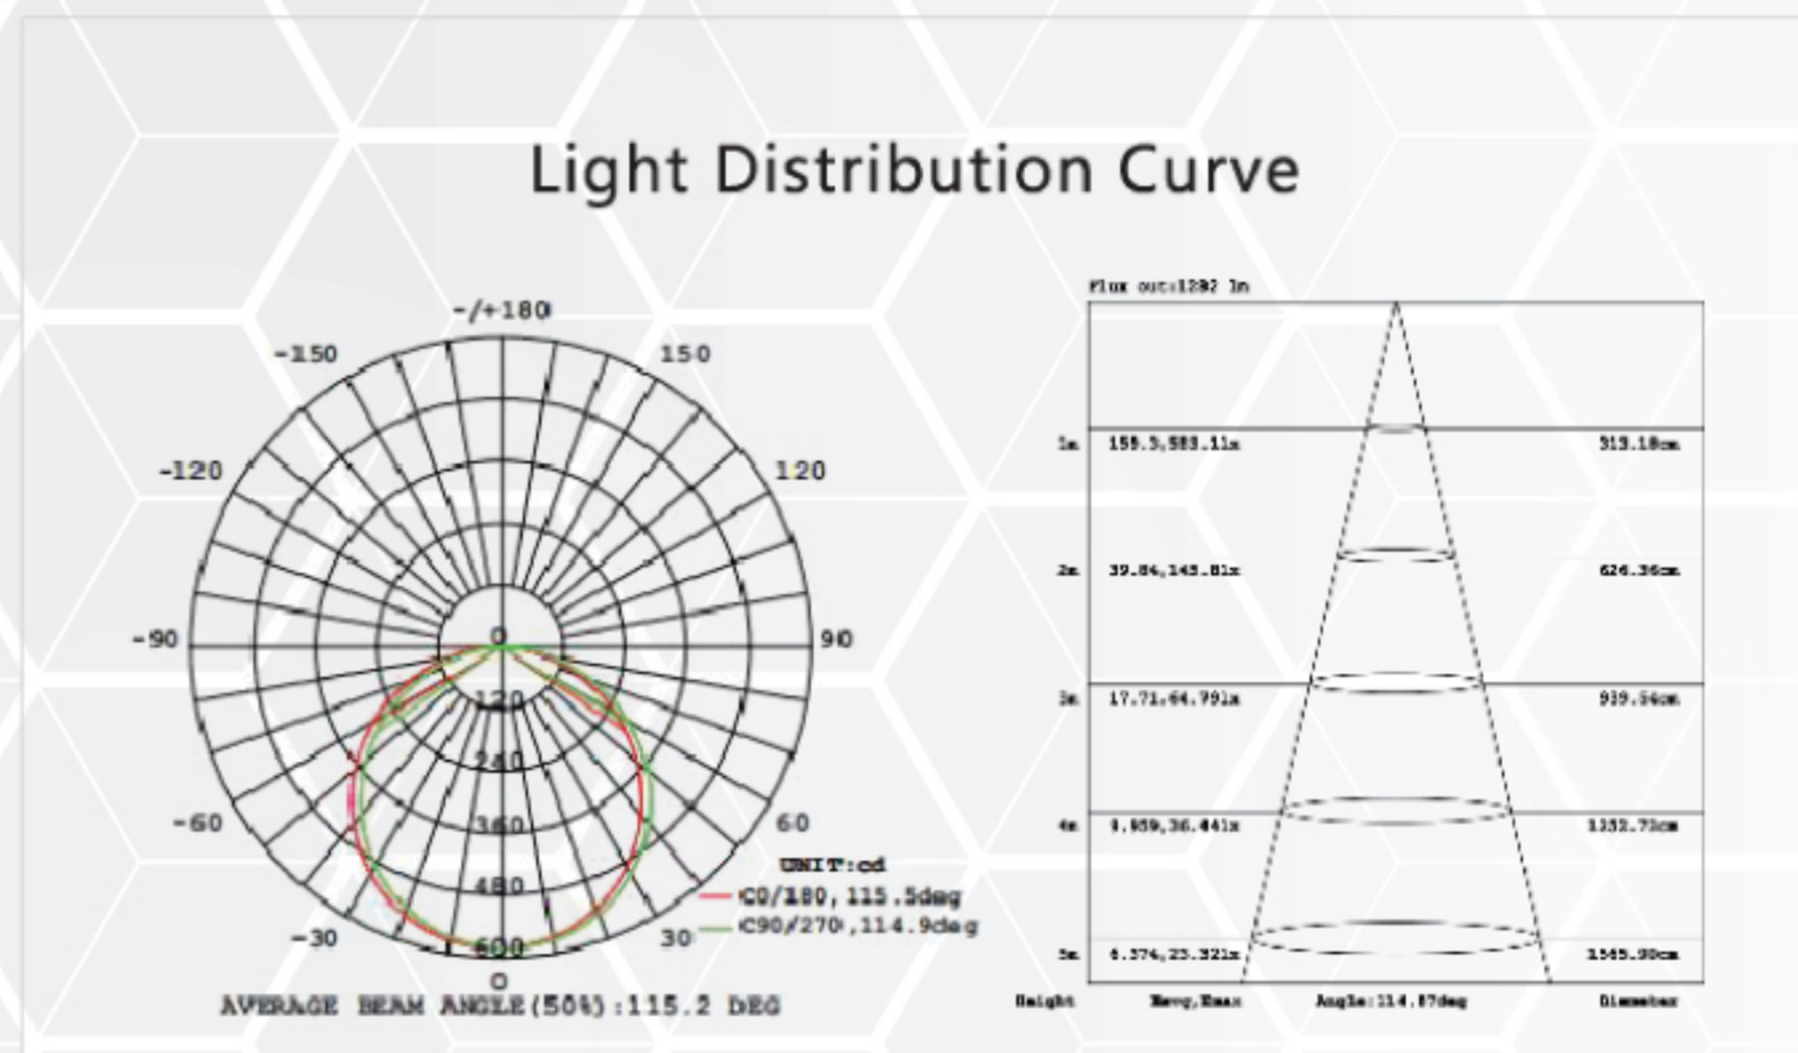

DETAILED VIEW

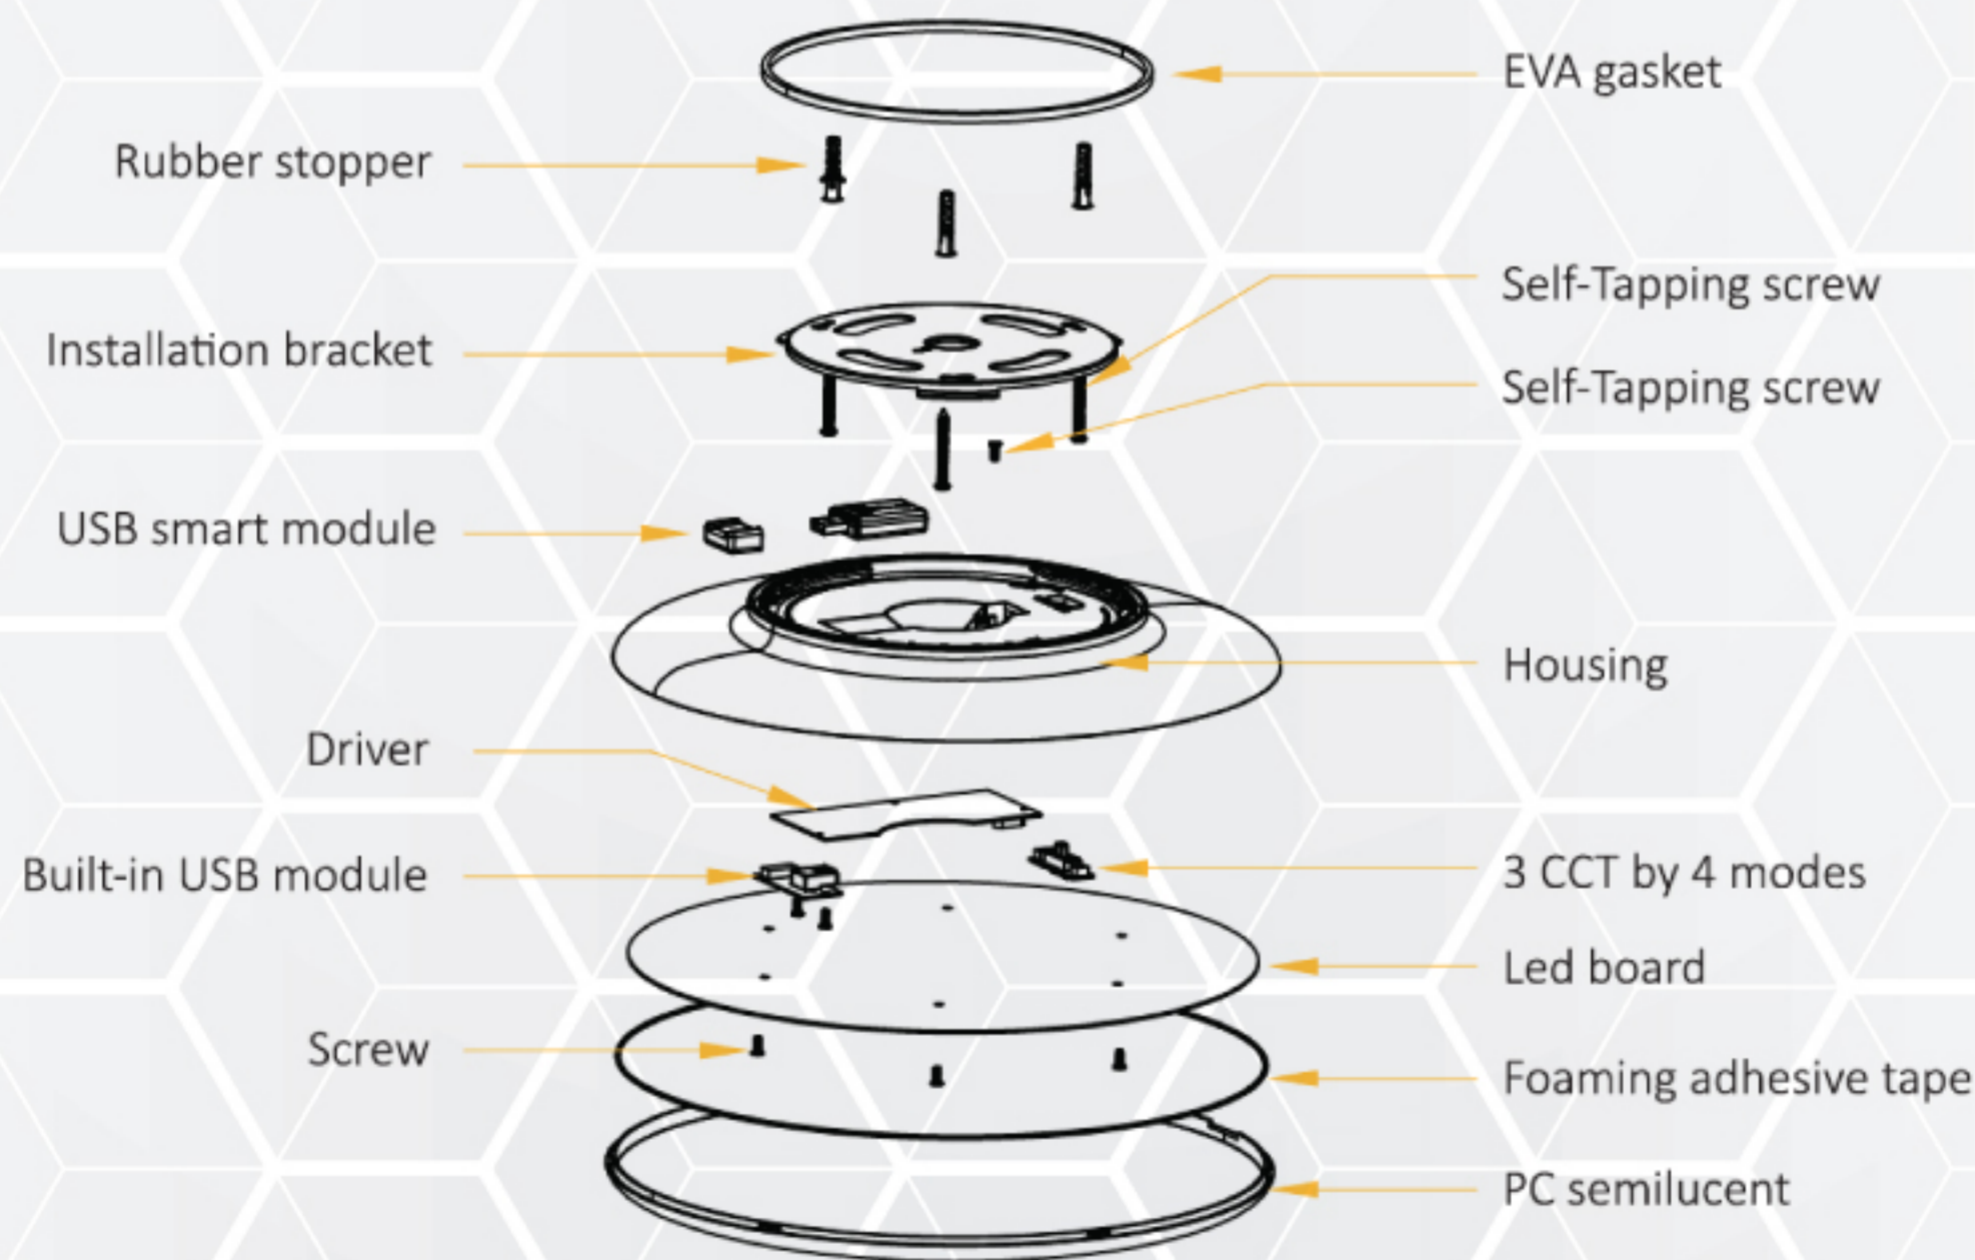

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.