

# LED Linear High Bays

MODEL 2HB165-3CCT+W | 4HB250-3CCT+W





## HIGHLIGHTS

- 2FT: 90W/120W/165W; 4FT: 200W/225W/250.
- Power and CCT can be adjusted in three levels.
- High quality driver; 1-10V dimming; Flicker Free.
- PF>0.90, driver efficiency>90%; THD<20%.
- Installation: chain mounting & Pedant Mounting.
- Suitable for dry/damp location.
- Five years warranty.

## SPECIFICATIONS


Model	2HB165-3CCT+W	4HB250-3CCT+W
Wattage	90W/120W/165W	200W/225W/250W
Voltage	AC 120-347V	
Frequency	50/60Hz	
Application	Warehouses / Gymnasiums / Industrial spaces, etc.	
Lifetime	≥50000 hours	
Luminous Efficacy	135Lm/W	
CRI	Ra>80	
Location	Dry/Damp	
Beam Angle	90°	
IP Rating	IP20	
CCT	3500K/4000K/5000K	
Operating Temp.	-40°C~45°C	
Case Quantities	4	2

## DIMENSIONS

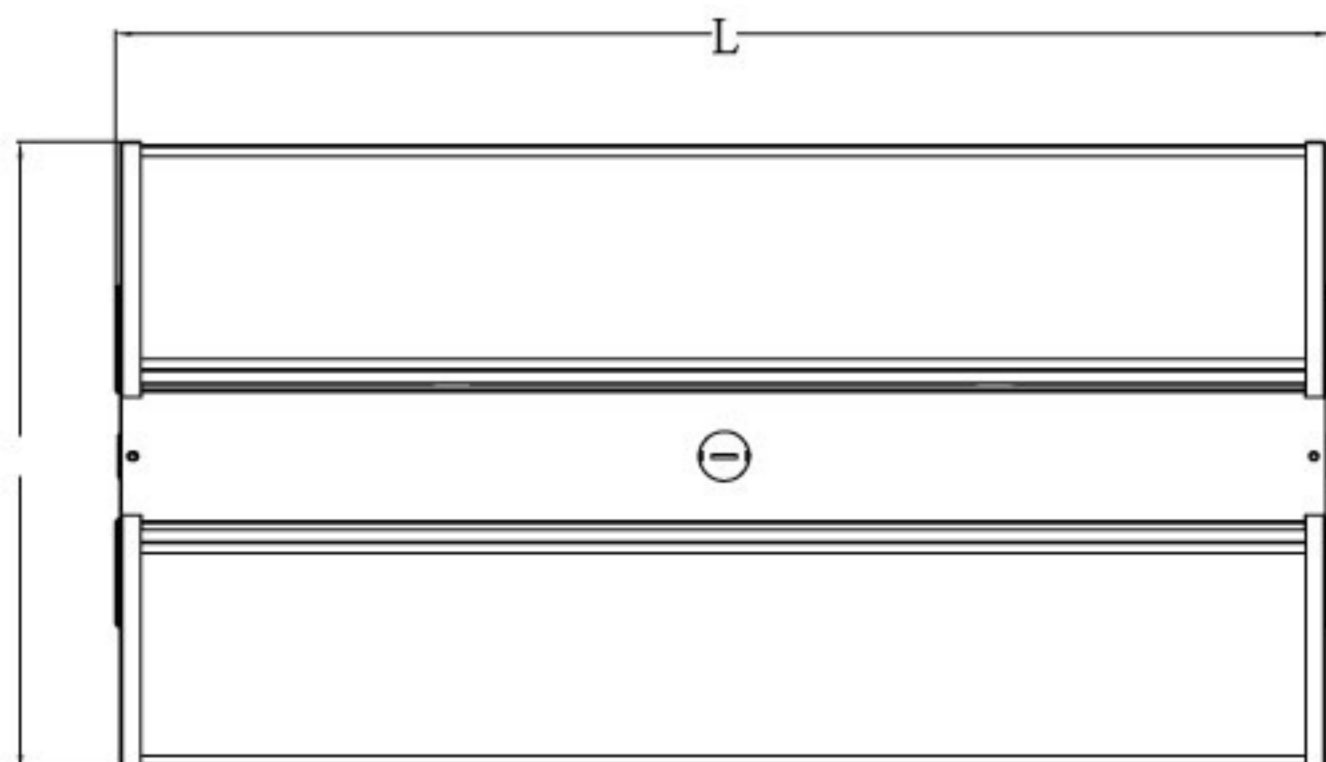

Model	L×W×H
2HB165-3CCT+W	626*323*51mm/24.65*12.8*2"
4HB250-3CCT+W	1166*323*51mm/45.9*12.8*2"

### TESTING REPORT

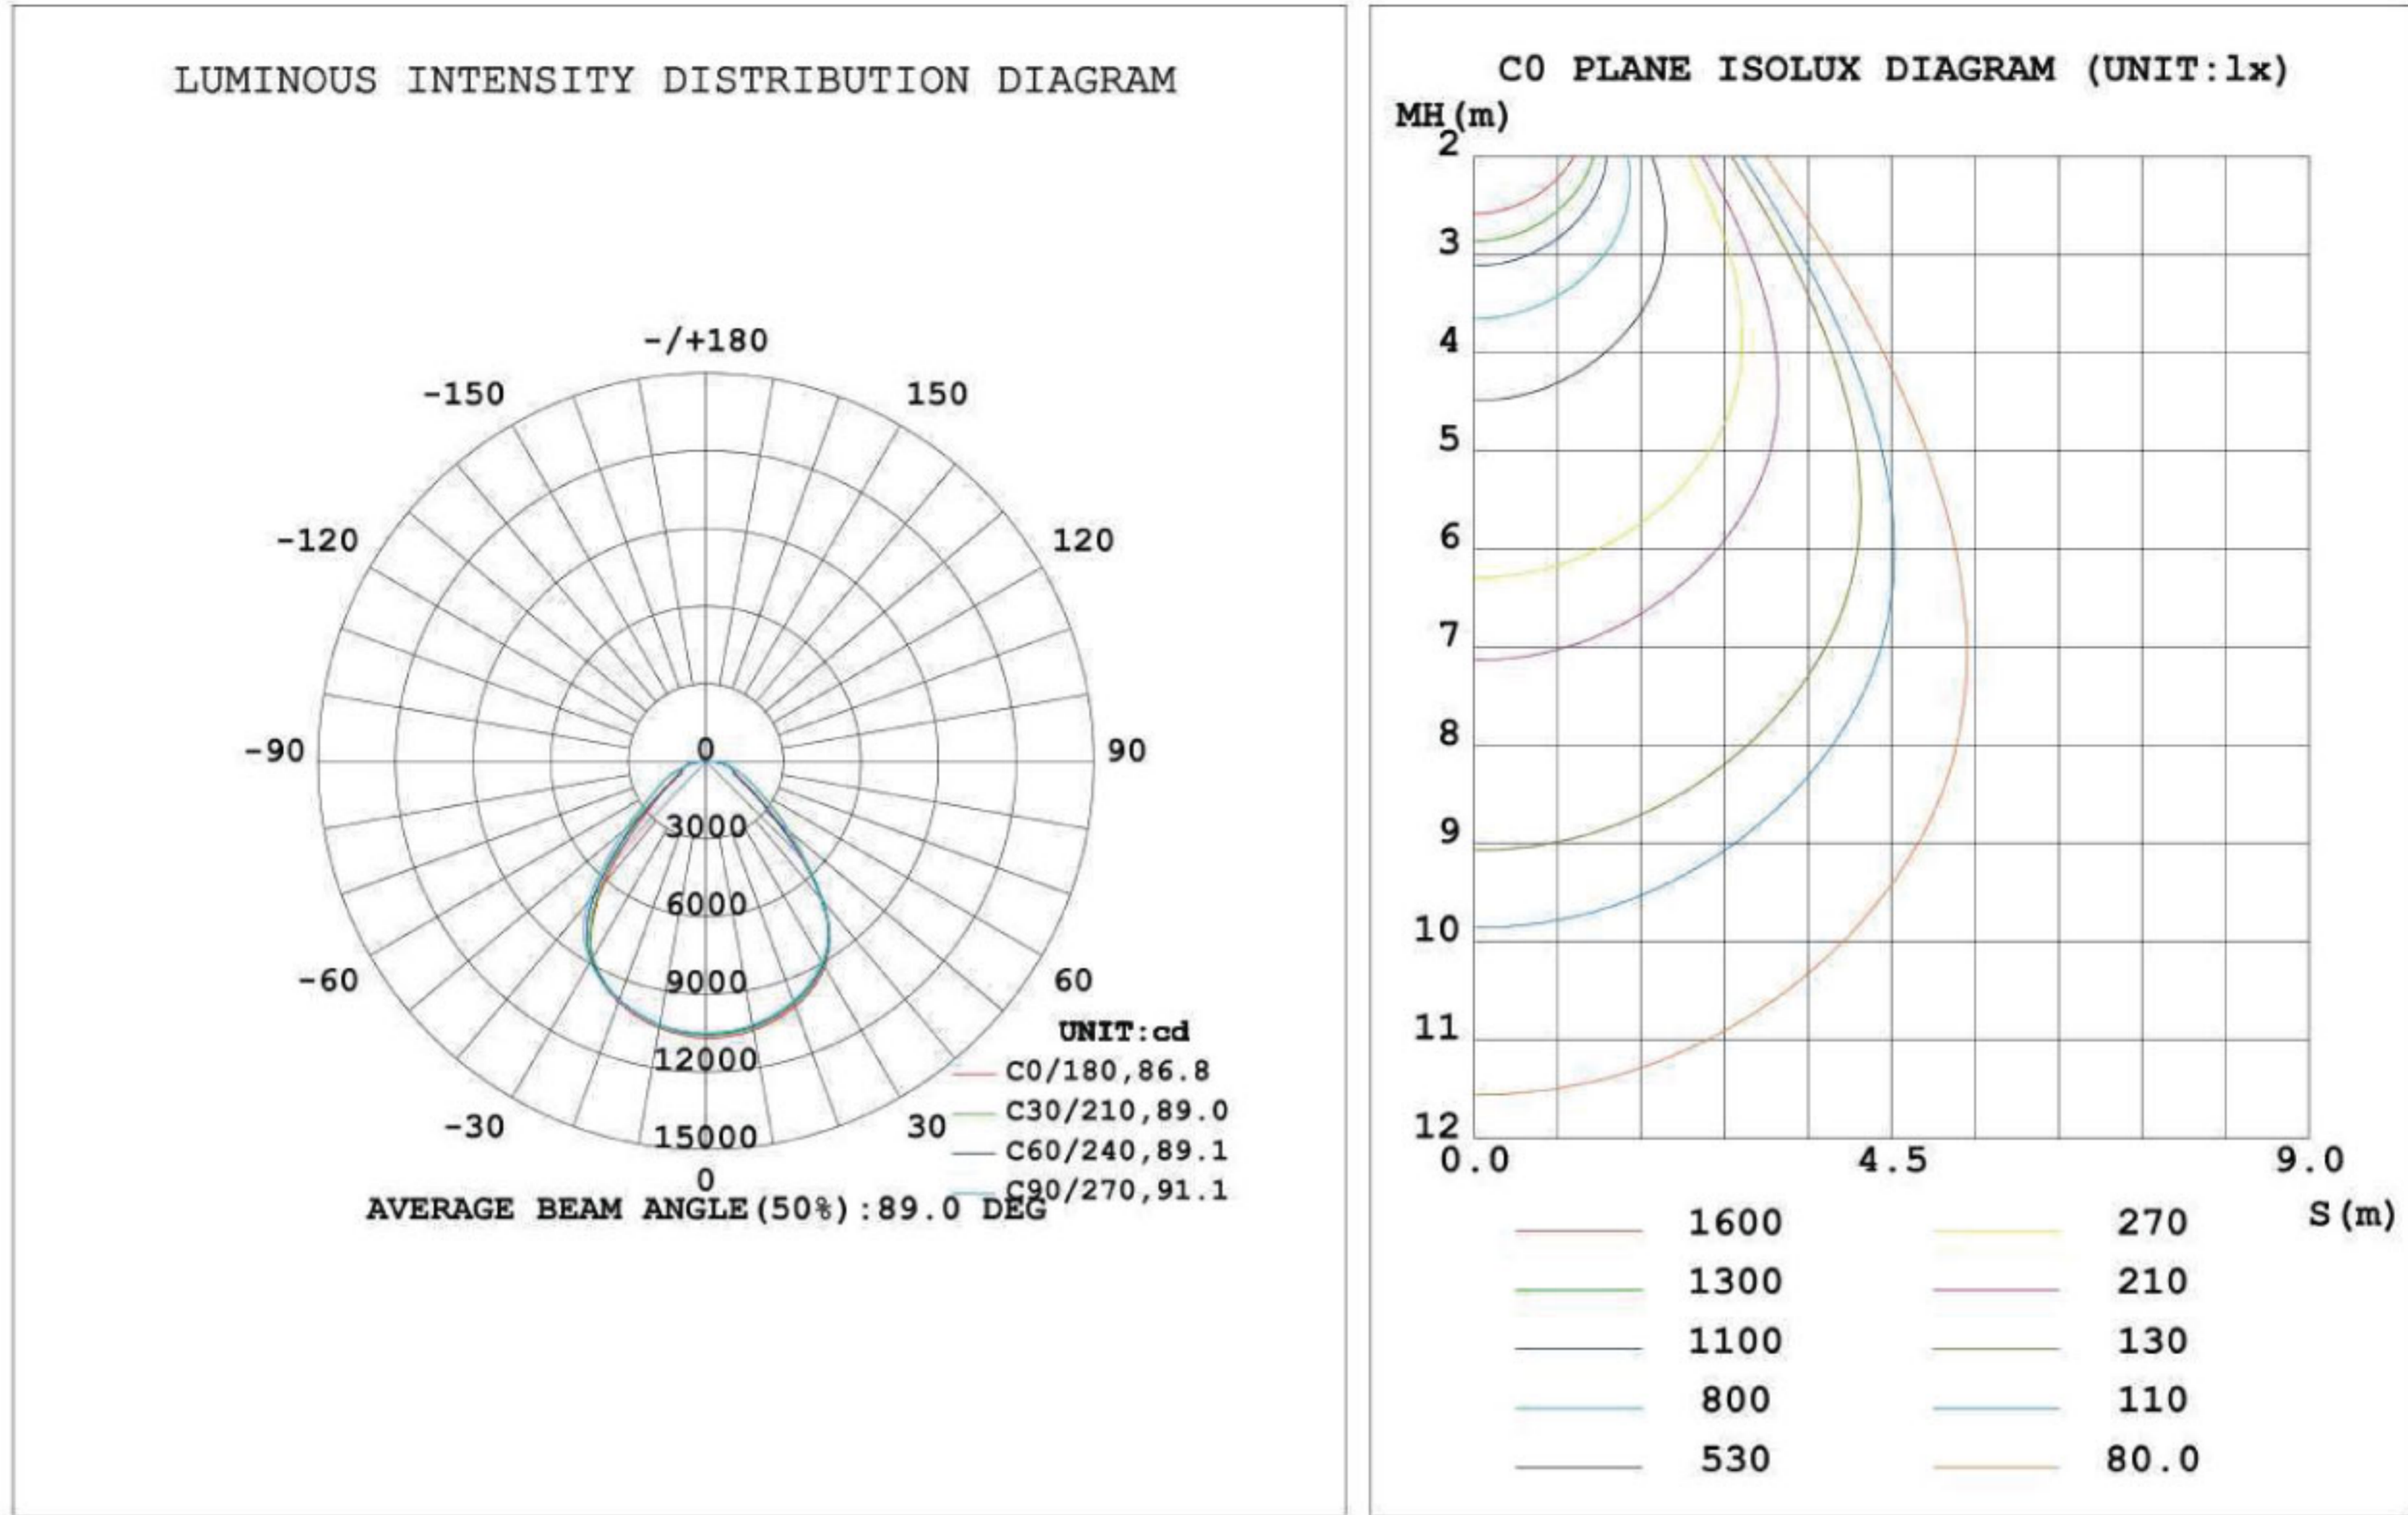

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.