

## MODEL DISC4FL-GM-WH



### HIGHLIGHTS

- No recessed housing required
- Compatible with industry standard TRIAC / ELV dimmers
- Easy and Fast installation — install directly into ceiling with clips
- Suitable for damp location where directly not exposed to rain or snow
- Has optical lens with 38° beam spread option, and 90° tilt and 360° rotation
- Ideal for sloped ceilings, wall washing, highlight artwork, task or general lighting, etc.
- Depth is 1-3/8", and for the best possible Layout Depth Flexibility, it should be installed right under joists - **driver NOT included in box**
- 4" Commercial / Residential grade LED Slim Gimbal Downlight of durable aluminum body perfect for directional accent lighting
- Case Quantities: 48

### MOUNTING



- Ceiling clearance required: 1-1/2"
- Cut hole in ceiling and snap fixture in Opening with attached spring clips

### SPECIFICATIONS


Model	<b>DISC4FL-GM-WH</b>
Wattage	9W
Voltage	120V
Lumens	700 lmn at 3000K / 740 lmn at 5000K
Beam Angle	38°
Lifetime	50000 hours
Cutout	ø 4-1/4" (108 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated, Indoor use, for Damp location
Grade of Protection	IP 44
Air Tight	Yes
Applications	Recessed ceiling / Balcony / Overhanging eaves, etc.
Colour Temp.	3000K (Warm White) / 5000K (Cool White)
Operating Temp.	-20°C ~ +40°C

## MODEL DISC4FL-GM-WH

### DIMENSIONS

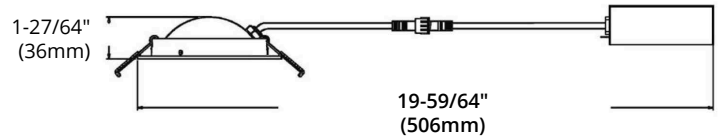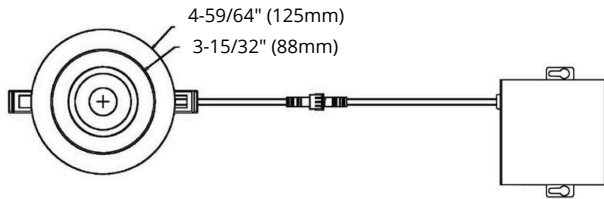


### EXPANSION FUNCTION

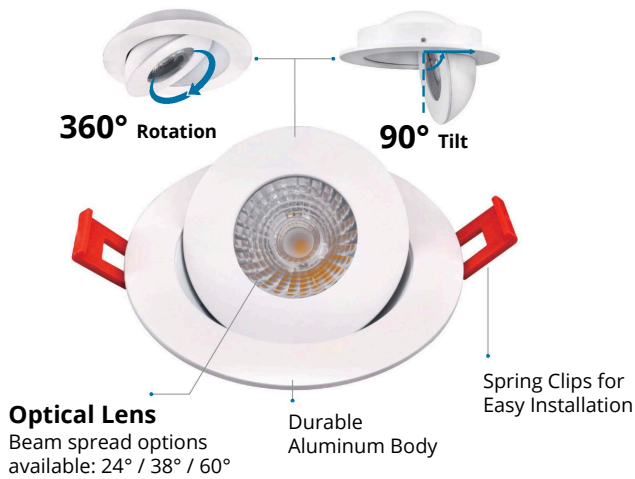

Back View



### Accessories (sold separately)

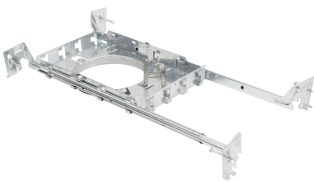

**PLATE4-HB**

Mounting Plate for ORTECH 4" Slim Lights




**PLATE26-4**

New Construction Plate for ORTECH 4" Slim Lights



**DMD-ELV**

Single-pole 3 way dimmer

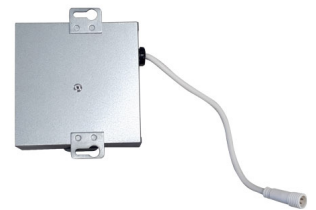

**OT-SLIM 4**

LED Driver for ORTECH 4" Slim Lights

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: