

LED FLUSH MOUNTS

FM1-5-5CCT | FM1-7-5CCT | FM1-9-5CCT | FM1-12-5CCT


HIGHLIGHTS

5", 7", 9" and 12" Flush Mounts With Adjustable CCT

- Edge-lit technology, no glare or dark spots, instant-on
- This 0.7" thick luminaire is easy to install on standard J-boxes with mounting bracket
- Construction: PC lamp body with white translucent acrylic lens
- Triac Dimmable, Certified airtight, IC rated
- CCT selectable: 2700K, 3000K, 3500K, 4000K, 5000K
- Rated for long life - over 50,000 hours



DIMENSIONS

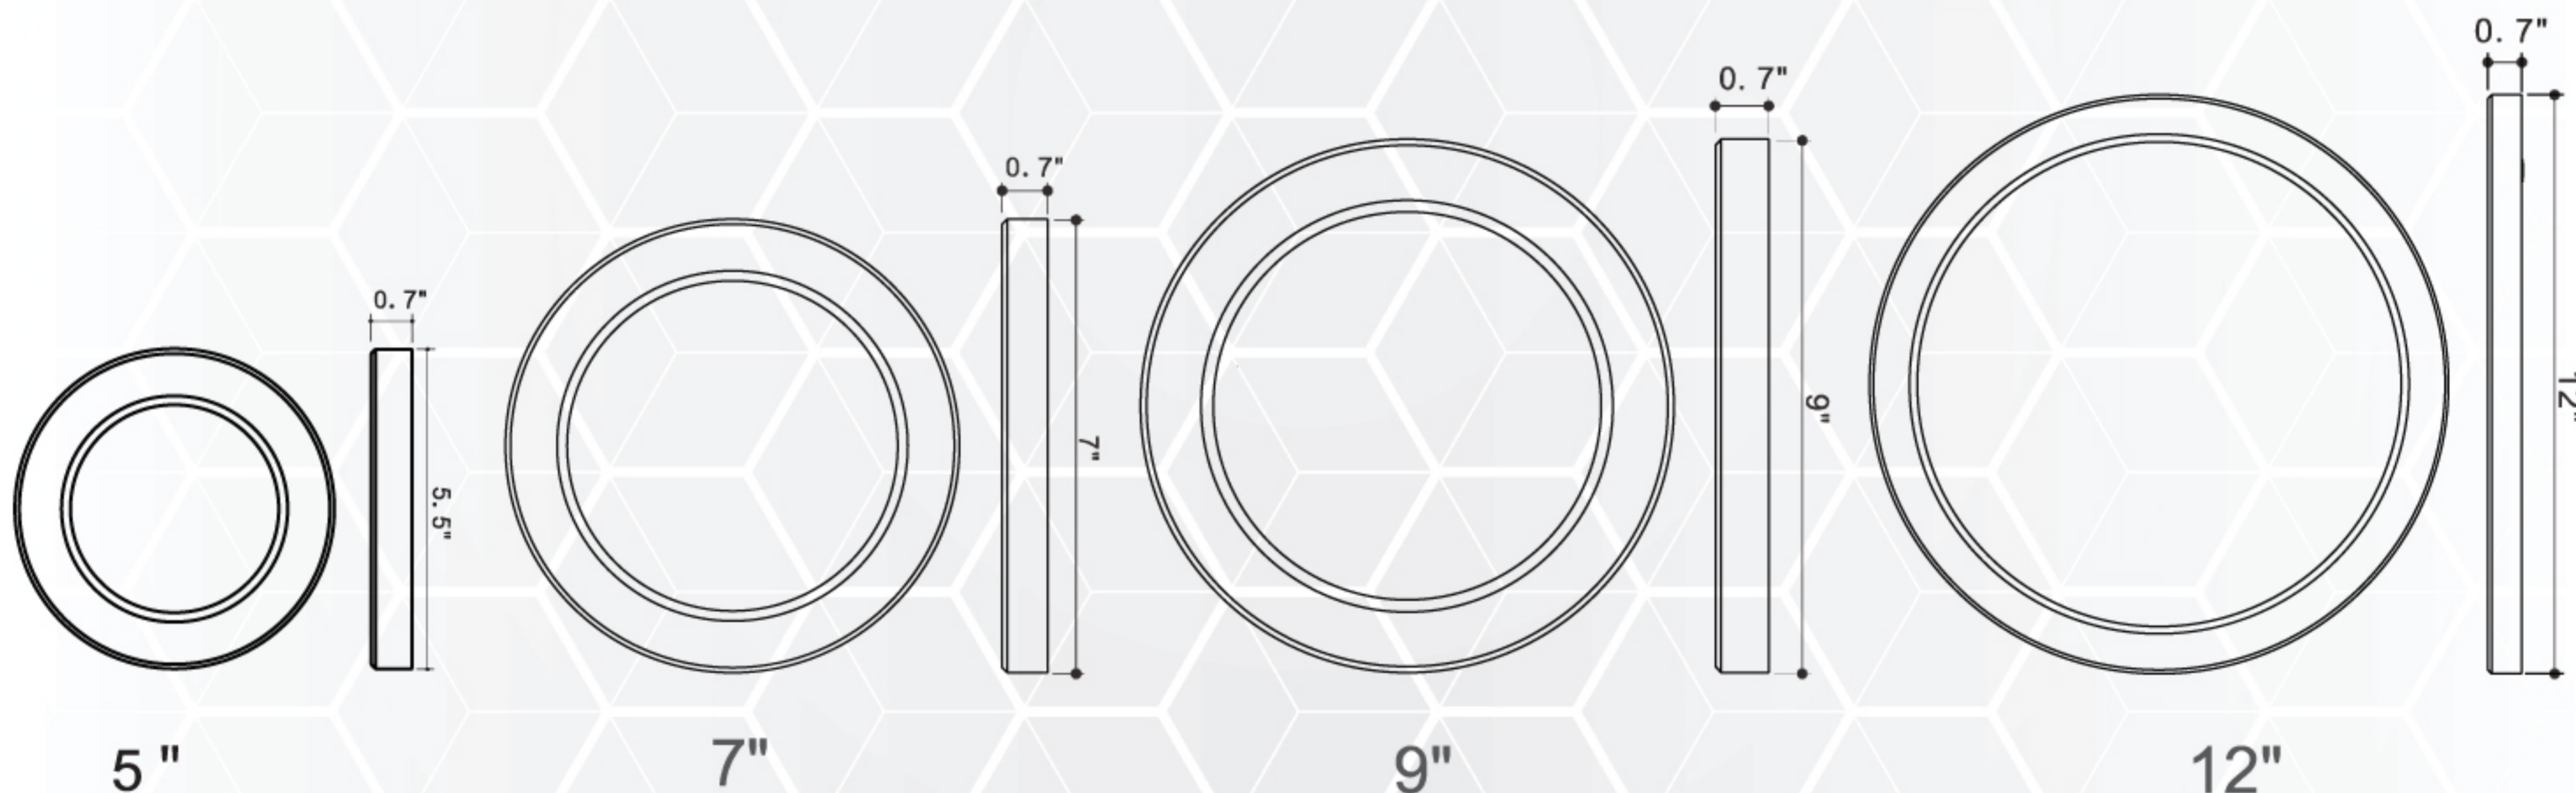

SPECIFICATIONS


| Model | FM1-5-5CCT | FM1-7-5CCT | FM1-9-5CCT | FM1-12-5CCT |
|---------------------|---|------------|------------|-------------|
| Wattage | 10W | 15W | 18W | 24W |
| Voltage | AC120V, 60Hz | | | |
| Lumens | 600lm | 1000lm | 1400lm | 1950lm |
| Beam Angle | 110° | | | |
| Lifetime | 50000 hours | | | |
| Air Tight | Yes | | | |
| Rating | IC rated Wet location Indoor use | | | |
| Grade of Protection | IP54 | | | |
| CRI | 80Ra+ | | | |
| Colour Temp. | 2700K / 3000K / 3500K / 4000K / 5000K | | | |
| Dimming | Triac Dimming | | | |
| Application | Corridors / Lobbies / Kitchens / Bathrooms / Bedrooms | | | |
| Operating Temp. | -20°C ~ +40°C | | | |

LED FLUSH MOUNTS

FM1-5-5CCT | FM1-7-5CCT | FM1-9-5CCT | FM1-12-5CCT

INSTALLATION

3" & 4" J-Box
(5" & 7" & 9")

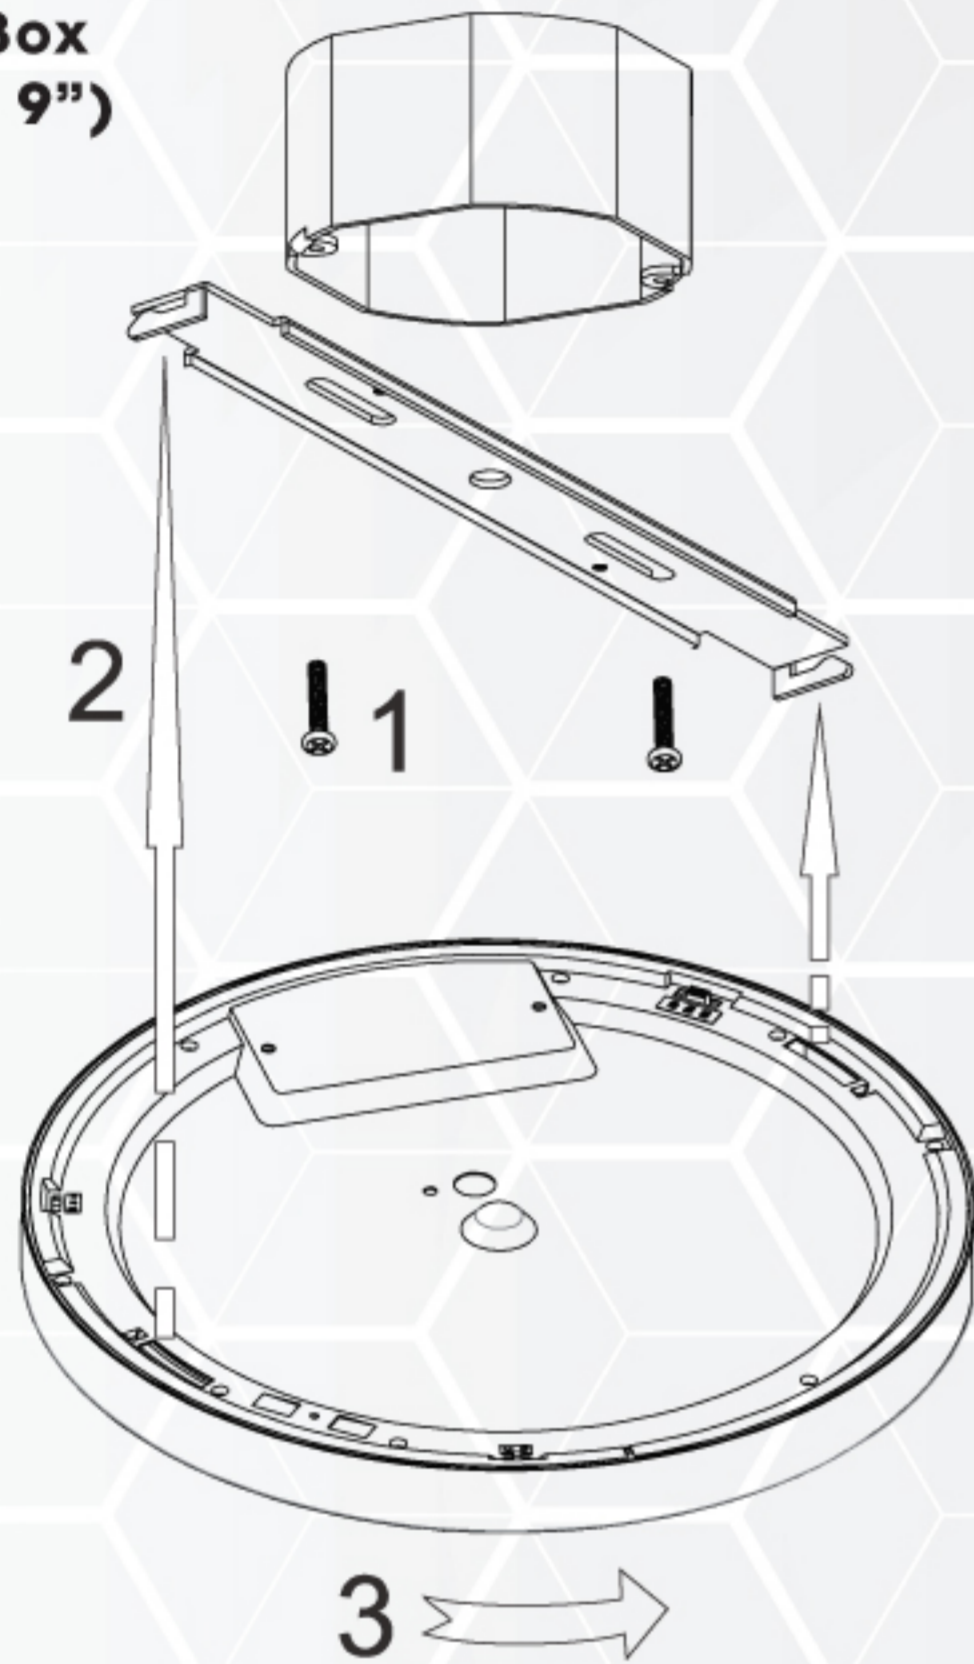

INCLUDED IN BOX

- 5" & 7" & 9" Plastic Round Slim Surface
- Two Mounting Screws
- Three Wire Nuts
- 1 mounting bracket



| Reference | QTY. | Remarks | Project: |
|-----------|------|---------|---------------|
| | | | Location: |
| | | | Architect: |
| | | | Engineer: |
| | | | Contractor: |
| | | | Submitted by: |
| | | | Date: |

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.