

LED FLUSH MOUNTS

2104-5CCT | 2106-5CCT | 2109-5CCT | 2112-5CCT


HIGHLIGHTS

Super slim frame design LED Flush Mounts with Adjustable CCT

- Edge-lit technology, no glare or dark spots, instant-on
- This 5/8" thick luminaire is easy to install on standard J-boxes with a quick snap
- Construction: plastic with white translucent acrylic lens
- Triac Dimmable, Certified airtight, IC rated
- CCT selectable: 2700K, 3000K, 3500K, 4000K, 5000K
- Five years warranty



DIMENSIONS

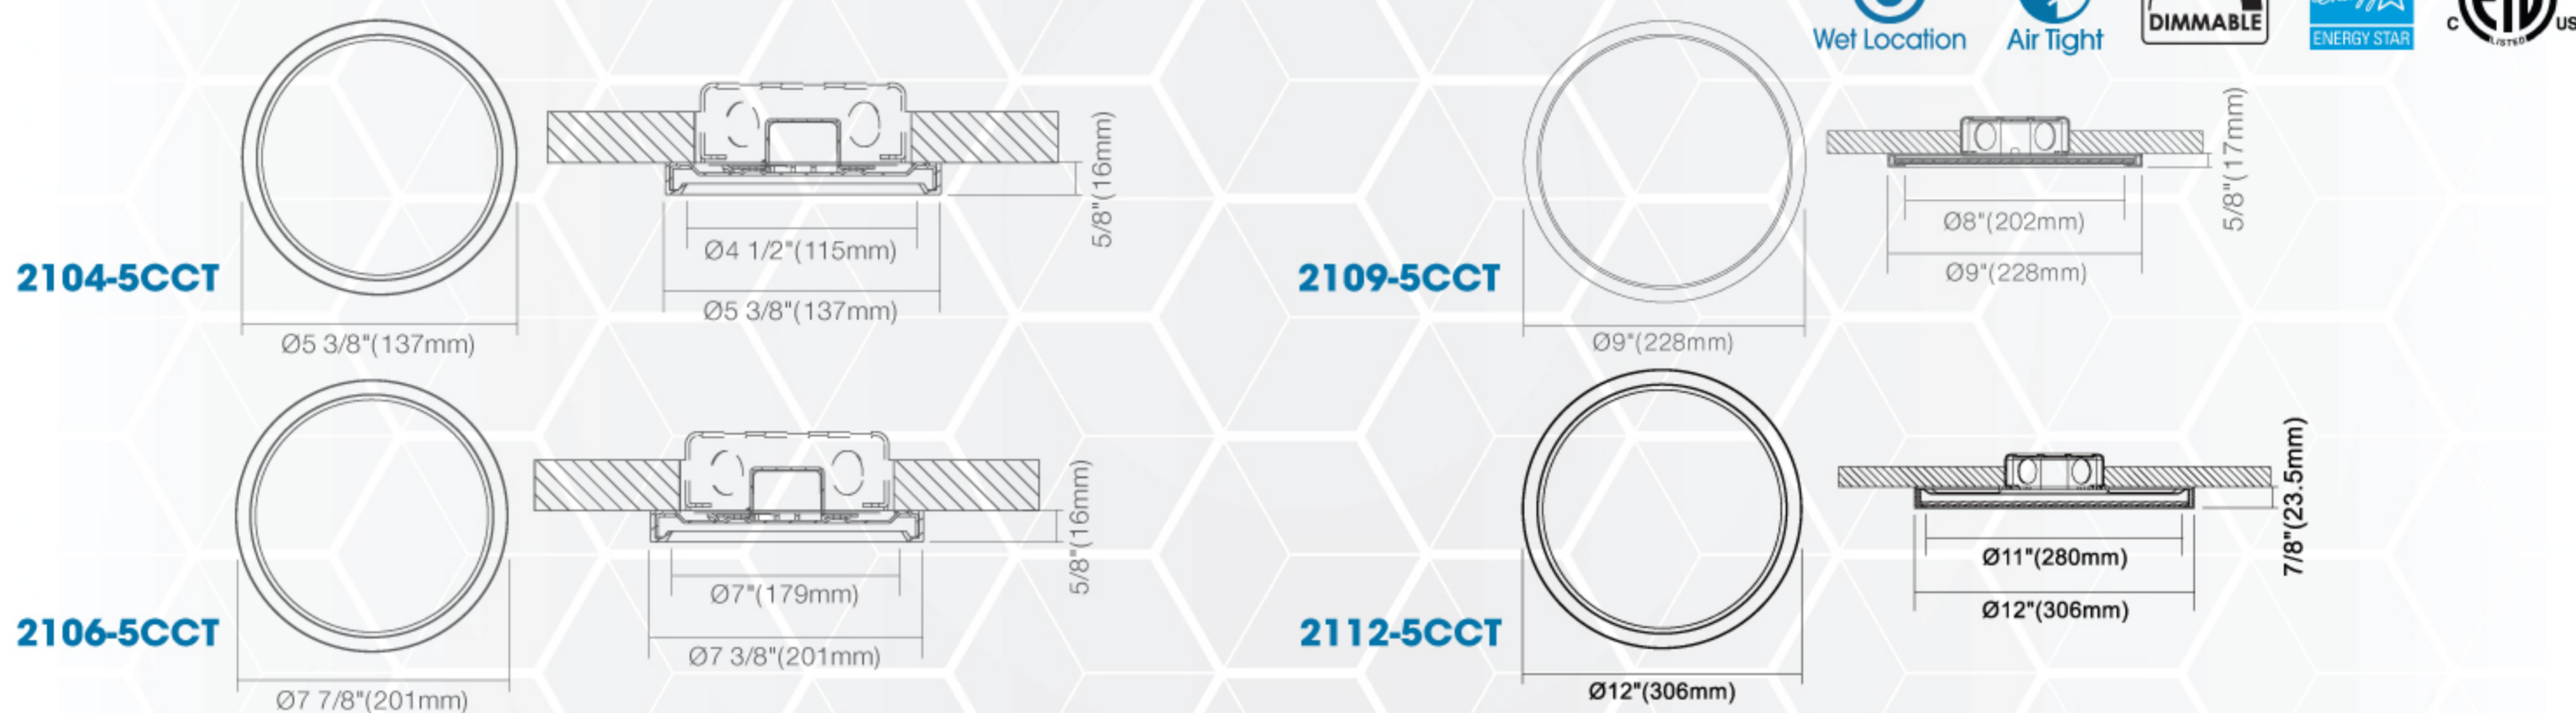

SPECIFICATIONS

Model	2104-5CCT	2106-5CCT	2109-5CCT	2112-5CCT
Wattage	10W	15W	18W	22W
Voltage	AC120V, 60Hz			
Lumens	600lm	1000lm	1200lm	1450lm
Beam Angle	120°			
Lifetime	50000 hours			
Dimmable	Yes			
Rating	IC rated Wet location Indoor use			
Grade of Protection	IP54			
CRI	80Ra			
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K			
Application	Corridors / Lobbies / Kitchens / Balconies / Bathrooms / Bedrooms			
Operating Temp.	-20°C ~ +40°C			
Case Quantities	20	20	20	6

LED FLUSH MOUNTS

2104-5CCT | 2106-5CCT | 2109-5CCT | 2112-5CCT

ACCESSORIES (SOLD SEPARATELY)



Round I Satin Nickel



Round I Black




Retrofit-Kits



INSTALLATION

4" J-Box

Accessories included:
Attach mounting bracket to J-box
Click downlight into mounting bracket

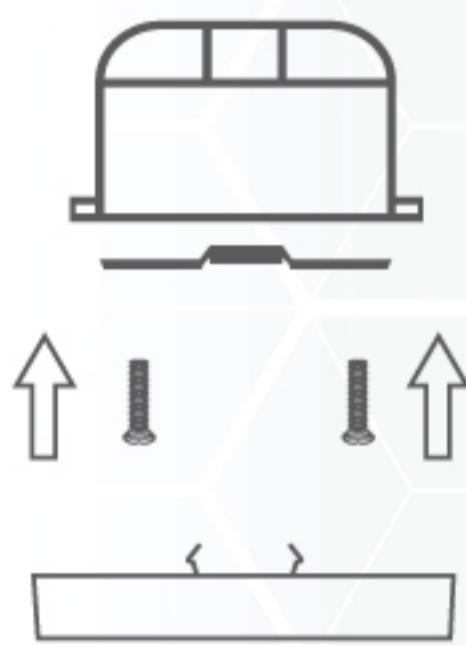

Mounting Bracket



J-Box Screws



Wire Nuts

4" Housing

Accessories sold separately
Connect E26 adapter to the LED adapter
Insert mounting clips and push downlight up until flush with ceiling



E26 Adapter



Mounting Clips for 4"/5"





Screw



LED Adapter

TESTING REPORT

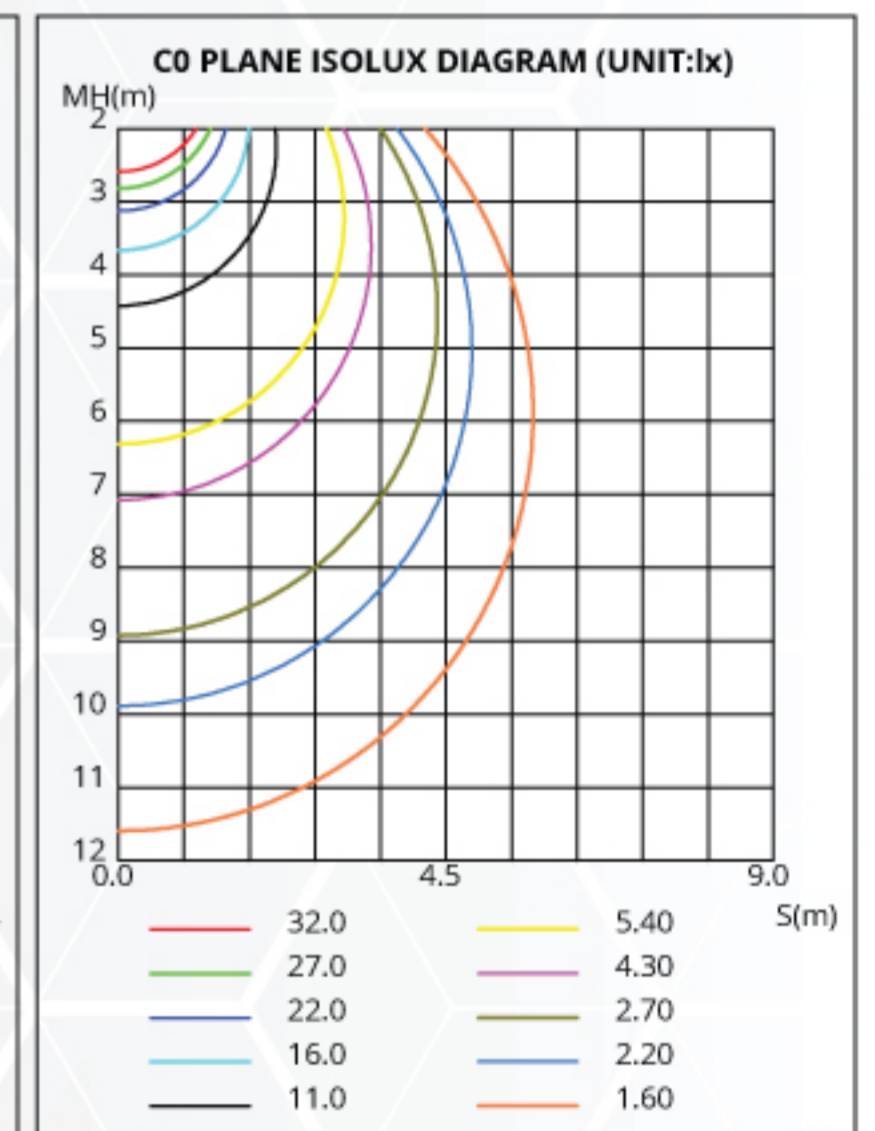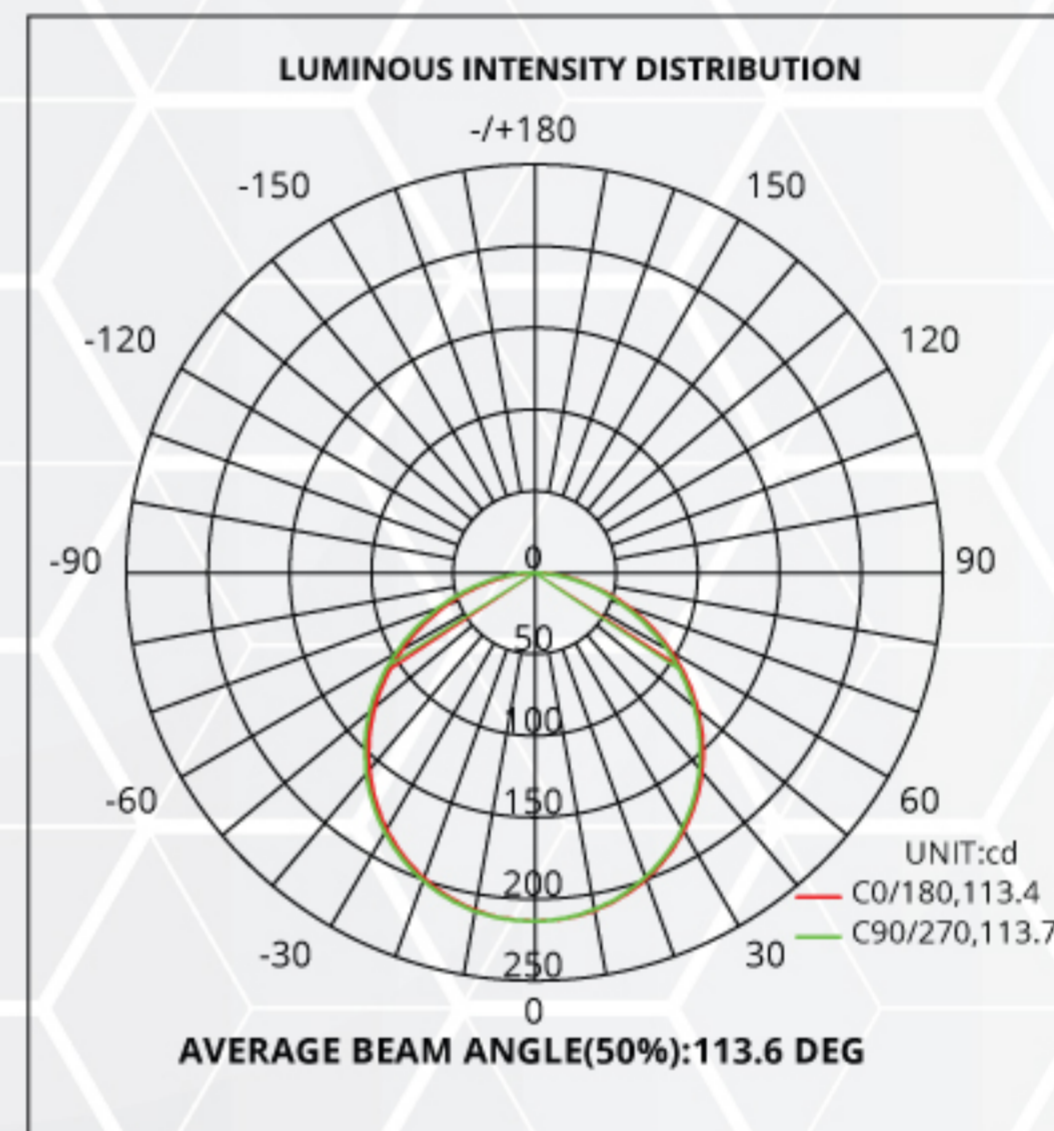

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.