

## LED SLIM LIGHTS

### SLIM6FR-5CCT


#### HIGHLIGHTS

##### 6" LED Fire Rated Recessed Downlight - with Adjustable CCT

- Reinforced and heat resistant steel casting providing 2-hour fire rating
- Junction box with commercial grade driver included
- Easy installation (no additional box required)
- 5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
- Tested & Certified to comply with UL 263-2011(R2022) & ASTM E119-20 & CAN/ULC-S101-14
- Rated for ceiling assemblies with up to 2 layers of drywall, each 5/8 inch, for a total of 1-1/4 inches



#### DIMENSIONS

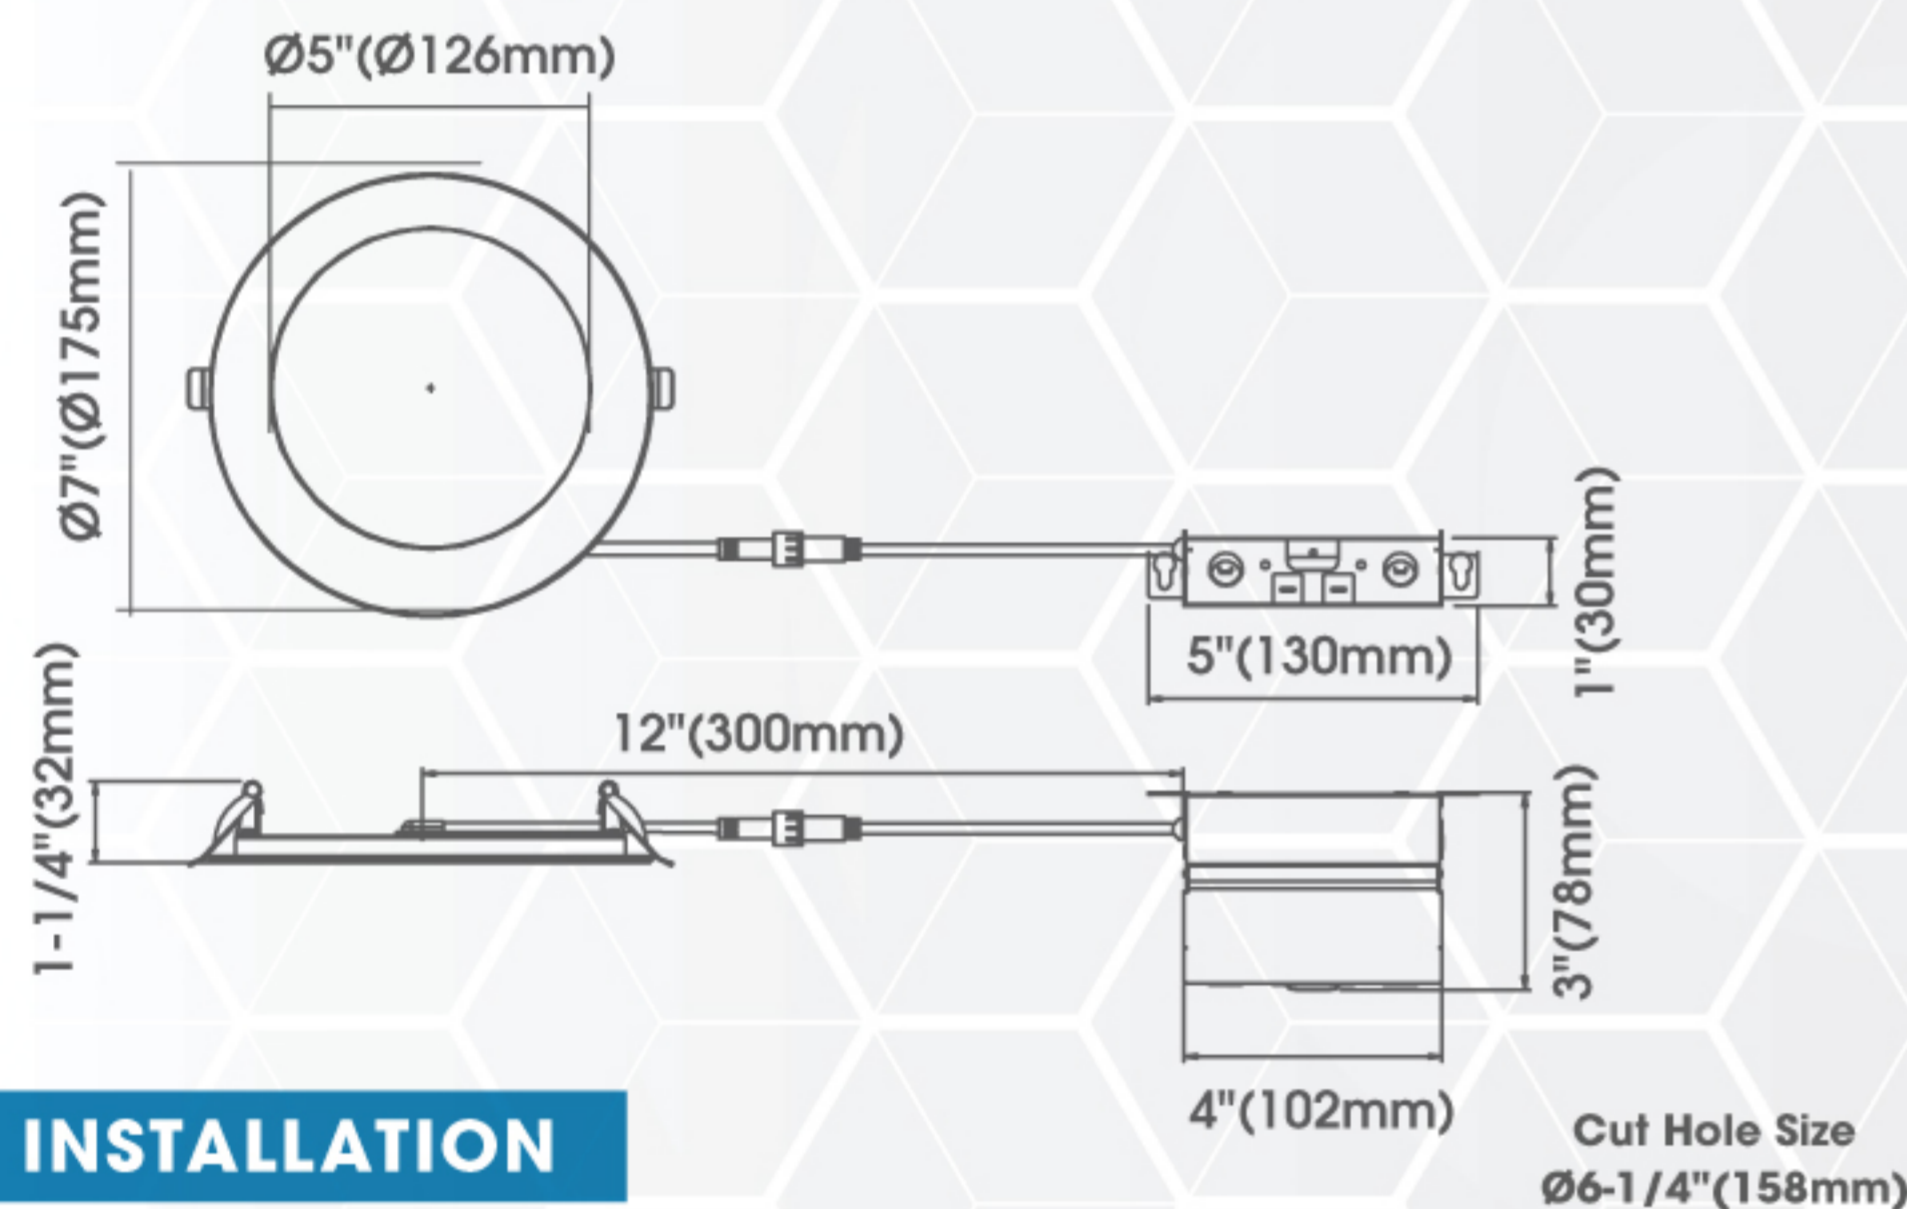

#### INSTALLATION



#### SPECIFICATIONS


Model	SLIM6FR-5CCT
Wattage	15W
Voltage	AC120V, 60Hz
Lumens	1000lm
Beam Angle	120°
Lifetime	50000 hours
Air Tight	Yes
Rating	IC rated   Wet locations
Grade of Protection	IP54
CRI   Warranty	80Ra   5 Years
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Dimming	Triac Dimming
Operating Temp.	-20°C ~ +40°C
Case Quantities	18



## LED SLIM LIGHTS

### SLIM6FR-5CCT

#### TESTING REPORT

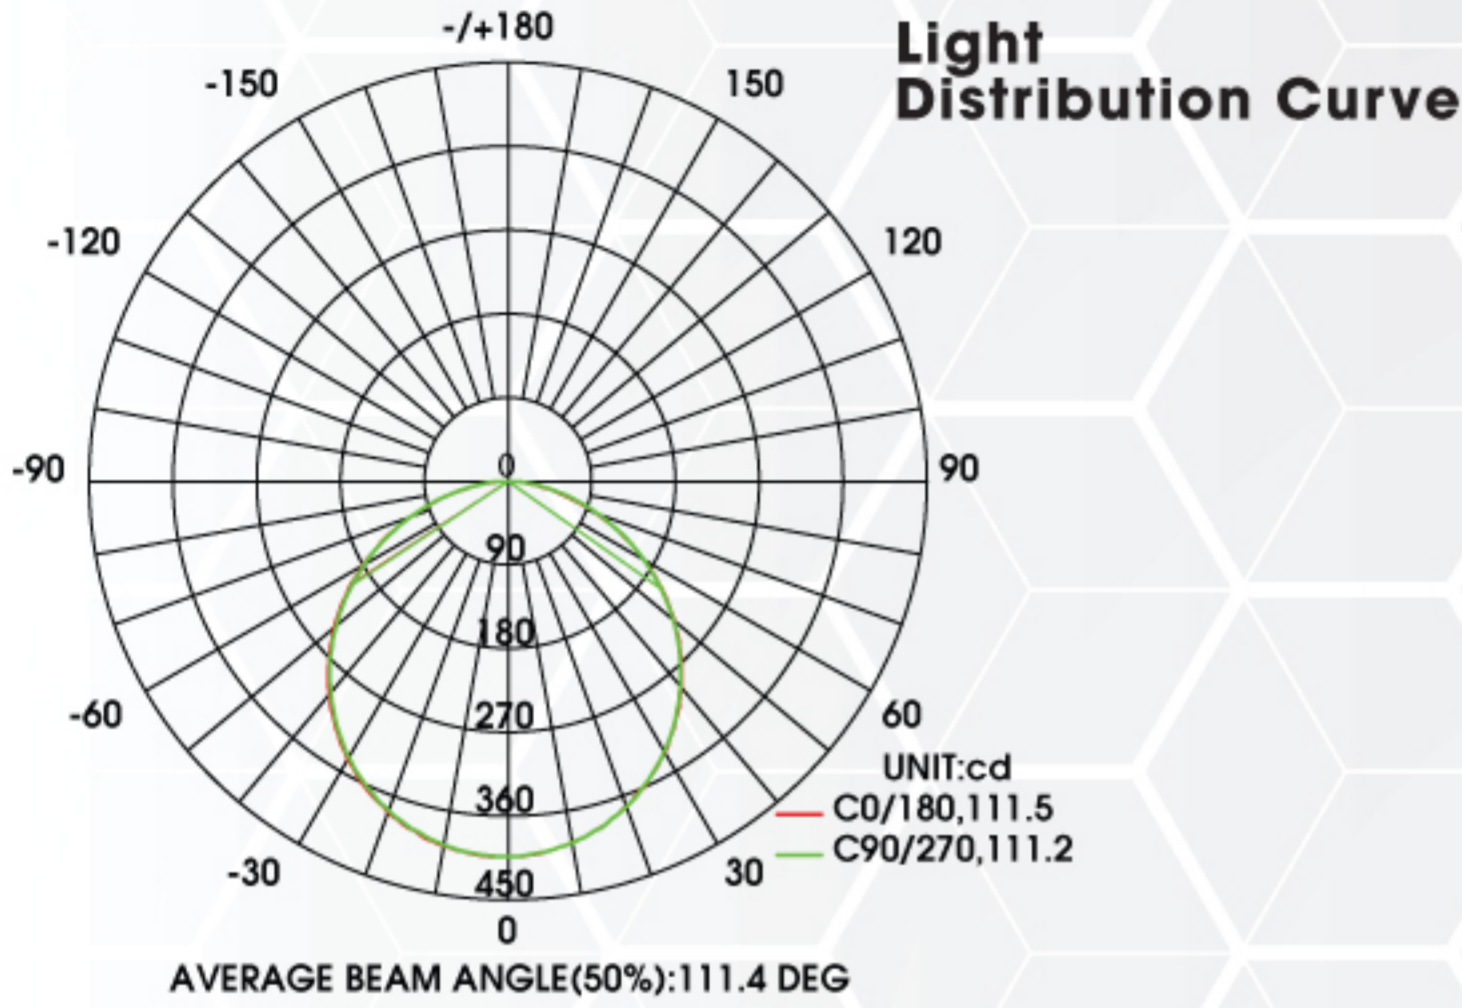

Height	Eavg, Errax	Angle: 111.13 deg	Diameter
1m	120.4,404.31x		291.71 CM
2m	30.10,101.11x		583.42 CM
3m	13.38,44.921x		875.12 CM
4m	7.525,25.271x		1166.83 CM
5m	4.816,16.171x		1458.54 CM
6m	3.345,11.231x		1750.24 CM
7m	2.457,8.2501x		2041.96 CM
8m	1.881,6.3171x		2333.66 CM
9m	1.486,4.9911x		2625.37 CM
10m	1.204,4.0431x		2917.08 CM

Polar Curves Wide Distribution



#### ACCESSORIES (SOLD SEPARATELY)

##### DECORATIVE TRIMS



SLIM6-RING SN  
(Satin Nickel)



SLIM6-RING BK  
(Black)

##### MOUNTING PLATES



PLATE 26-6



PLATE 6-HB



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.