


# LED Slim Lights

## MODEL SLIM4FR-5CCT

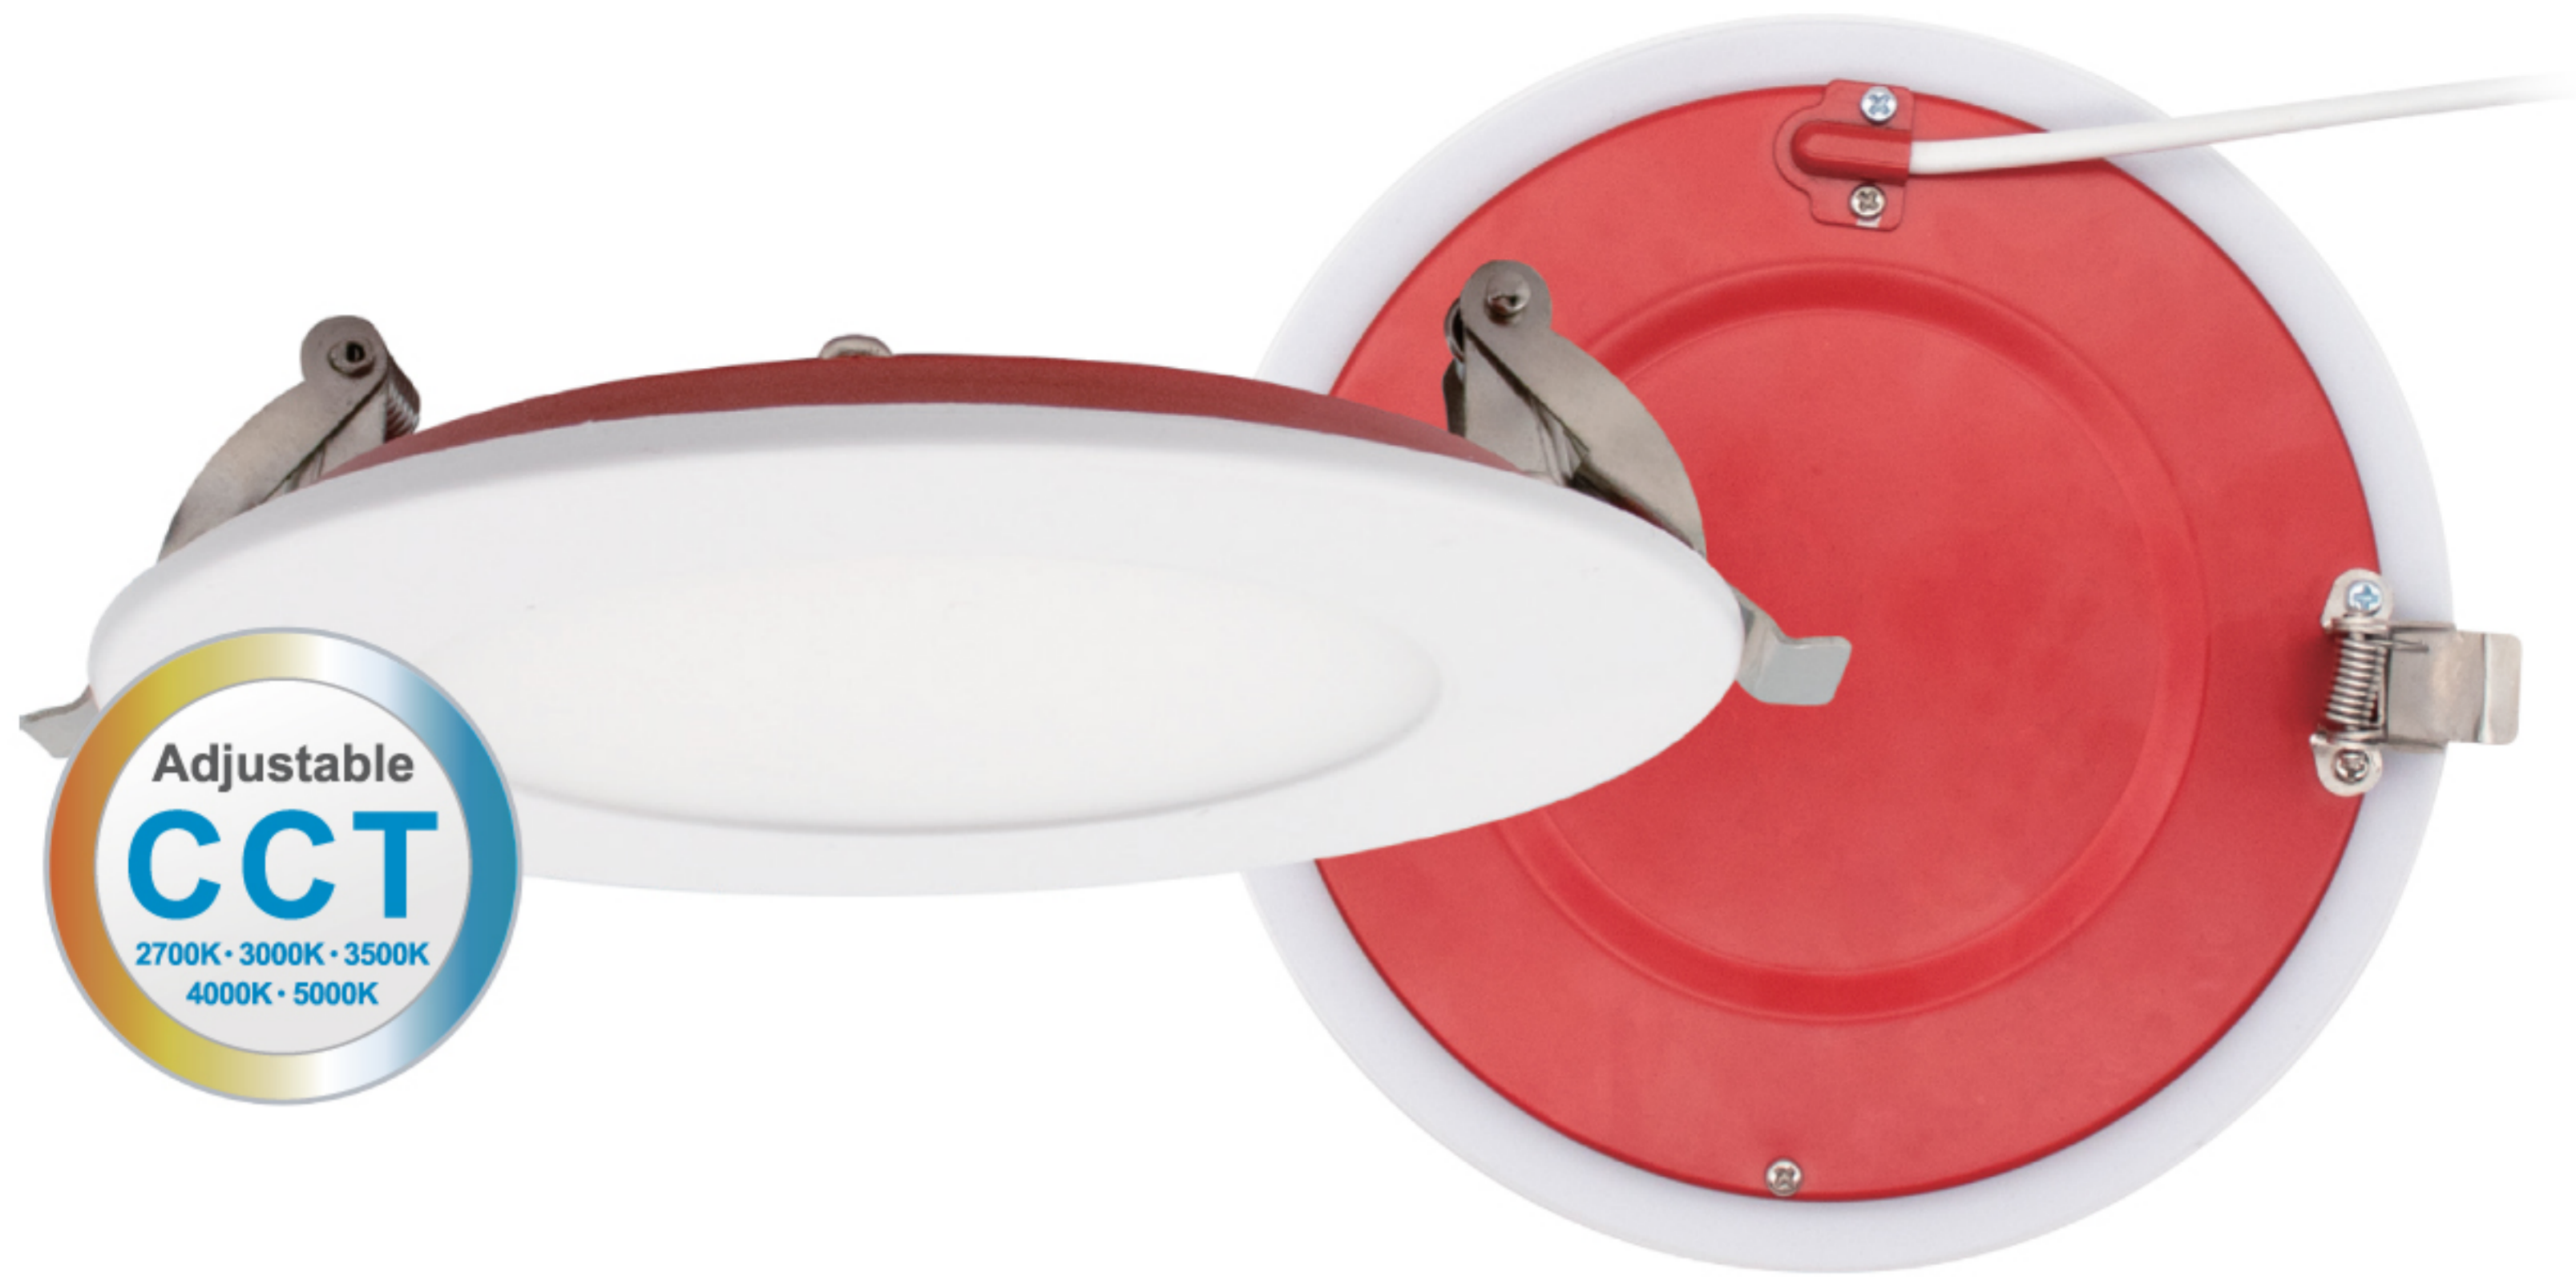


### HIGHLIGHTS

- Reinforced and heat resistant steel casting providing 2-hour fire rating
- 4" LED Fire Rated Recessed Downlight - with Adjustable CCT
- Residential / Commercial grade driver included
- Tested & Certified to comply with UL 263-2011(R2022) & ASTM E119-20 & CAN/ULC-S101-14
- Rated for ceiling assemblies with up to 2 layers of drywall, each 5/8 inch, for a total of 1-1/4 inches

### SPECIFICATIONS


Model	<b>SLIM4FR-5CCT</b>
Wattage	12W
Voltage	120V AC
Dimmable	Yes
Light Output	800 lmn
Power Factor	>0.9
Application	Recessed ceiling / Balcony / Overhanging eaves
CRI   Warranty	80Ra   5 Years
Location	Wet Location
Grade Of Protection	IP54
Beam Angle	120°
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Operating Temp.	-20°C~40°C
Case Quantities	18

### DIMENSIONS

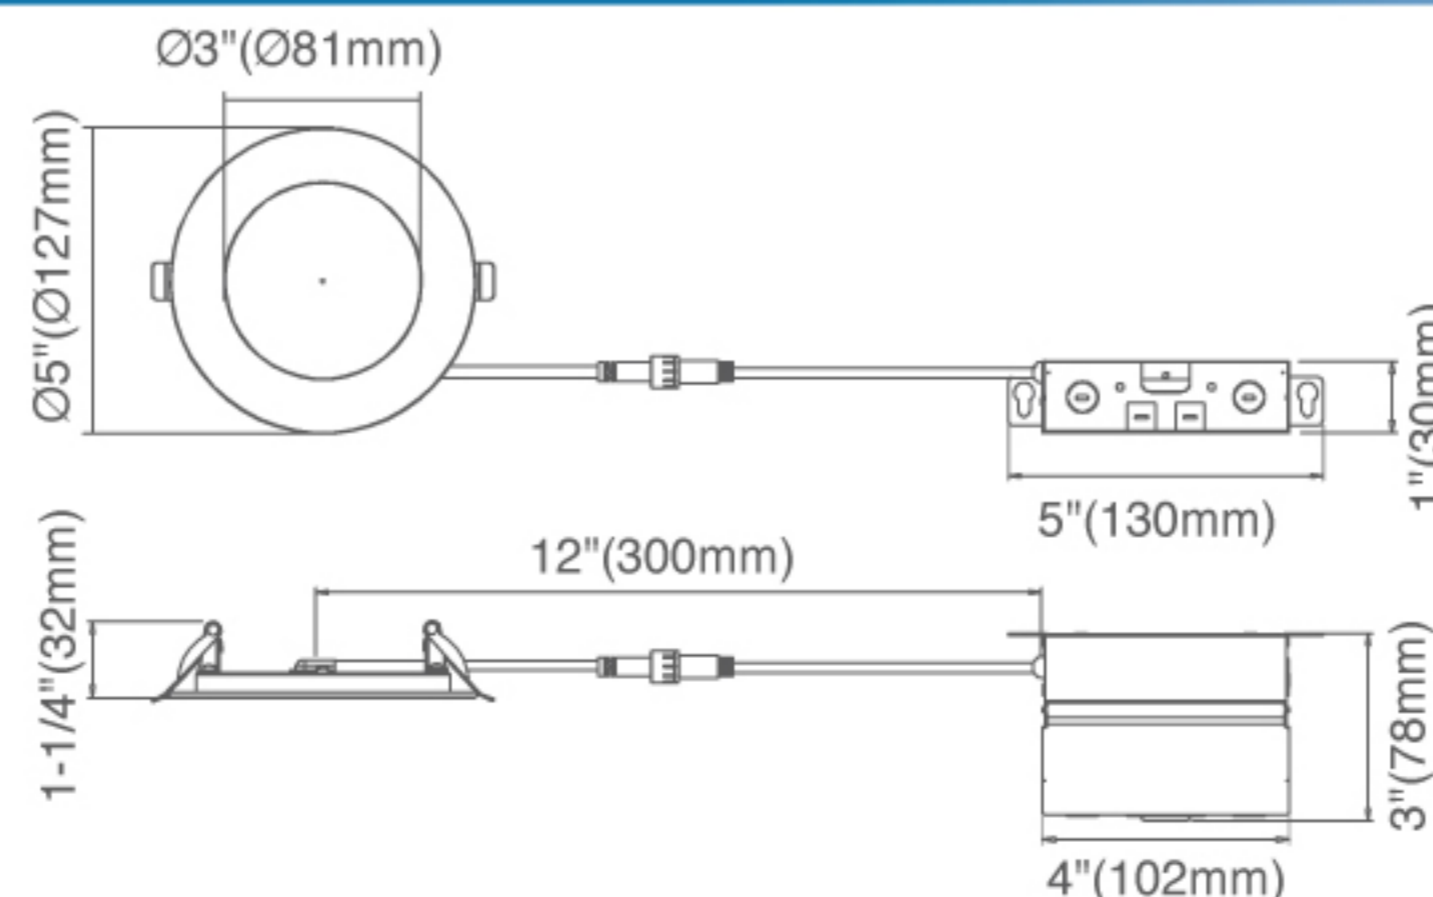



**INSTALLATION**

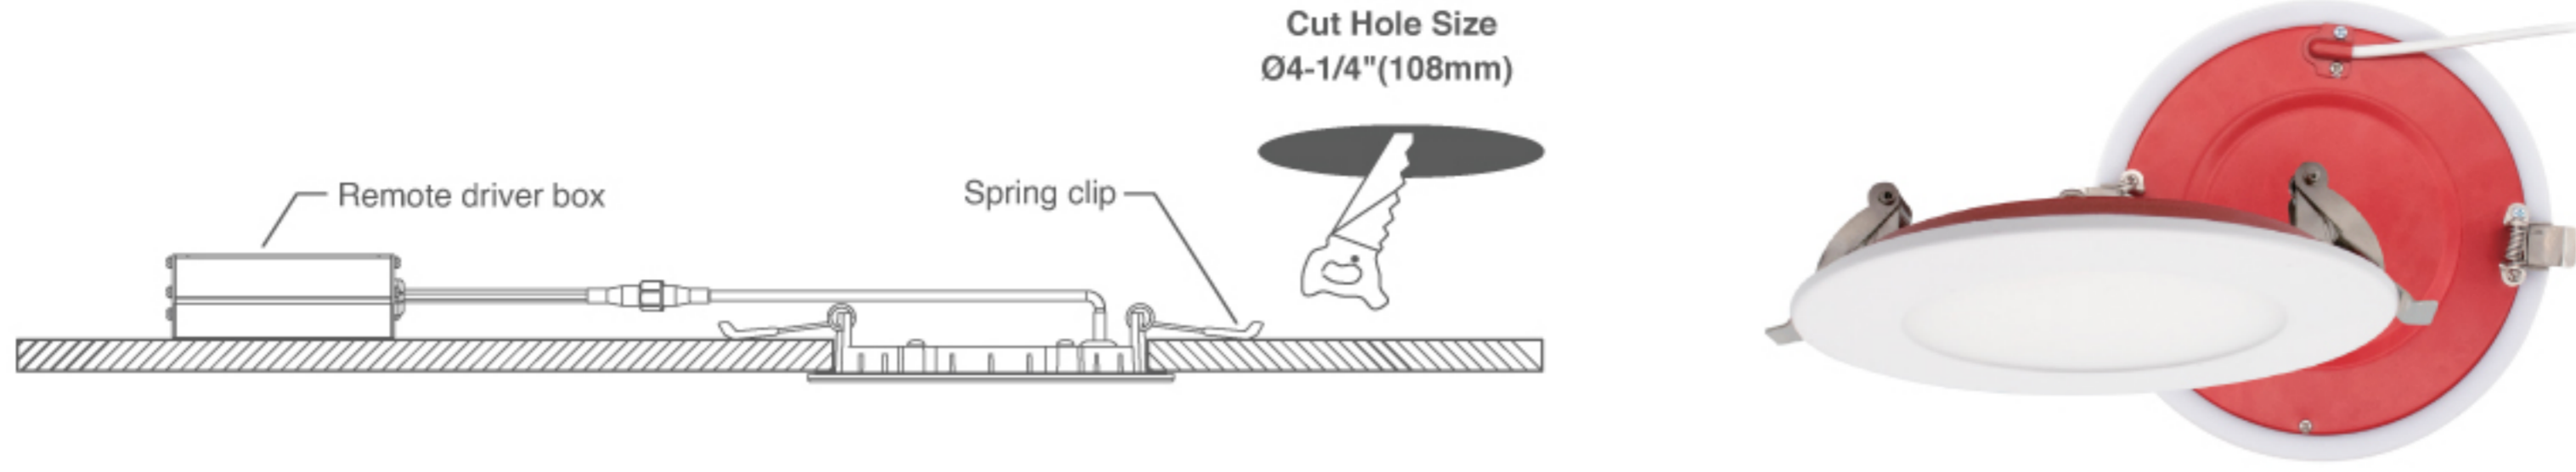

**ACCESSORIES (SOLD SEPARATELY)**

**DECORATIVE TRIMS**



**SLIM4-RING BK**  
(Black Ring)



**SLIM4-RING SN**  
(Satin Nickel Ring)

**MOUNTING PLATES**



**PLATE 26-4A**



**PLATE 4A-HB**

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.