


ENERGY RECOVERY VENTILATOR

ODD-ERV-150

HIGHLIGHTS

Energy Recovery Ventilator with efficient cross-flow core

- Brings a continuous supply of fresh air into the home while exhausting contaminated air
- Equipped with automatic defrost mechanisms so you can use your ERV all year long
- Super Compact Size: **24 11/64 * 26 13/16 * 9 11/64 inches**
- Includes Easy-Mount Bracket
- Washable Graphene Modified Polymer Membrane Energy Recovery Core
- Easy Access Service Door
- Estimated sound level is less than 1.6 Sones at 5 ft. in a free field conditions at continuous low speed*
- Configurable motors for balancing | Push button timer switch
- **Case:** Galvanized steel/Pre-paint steel
- **Insulation:** Cabinet is fully insulated with high density expanded polystyrene
- **Filter:** Two (2) washable MERV 8 primary filters
- **CSA standard C439-18 compliant**

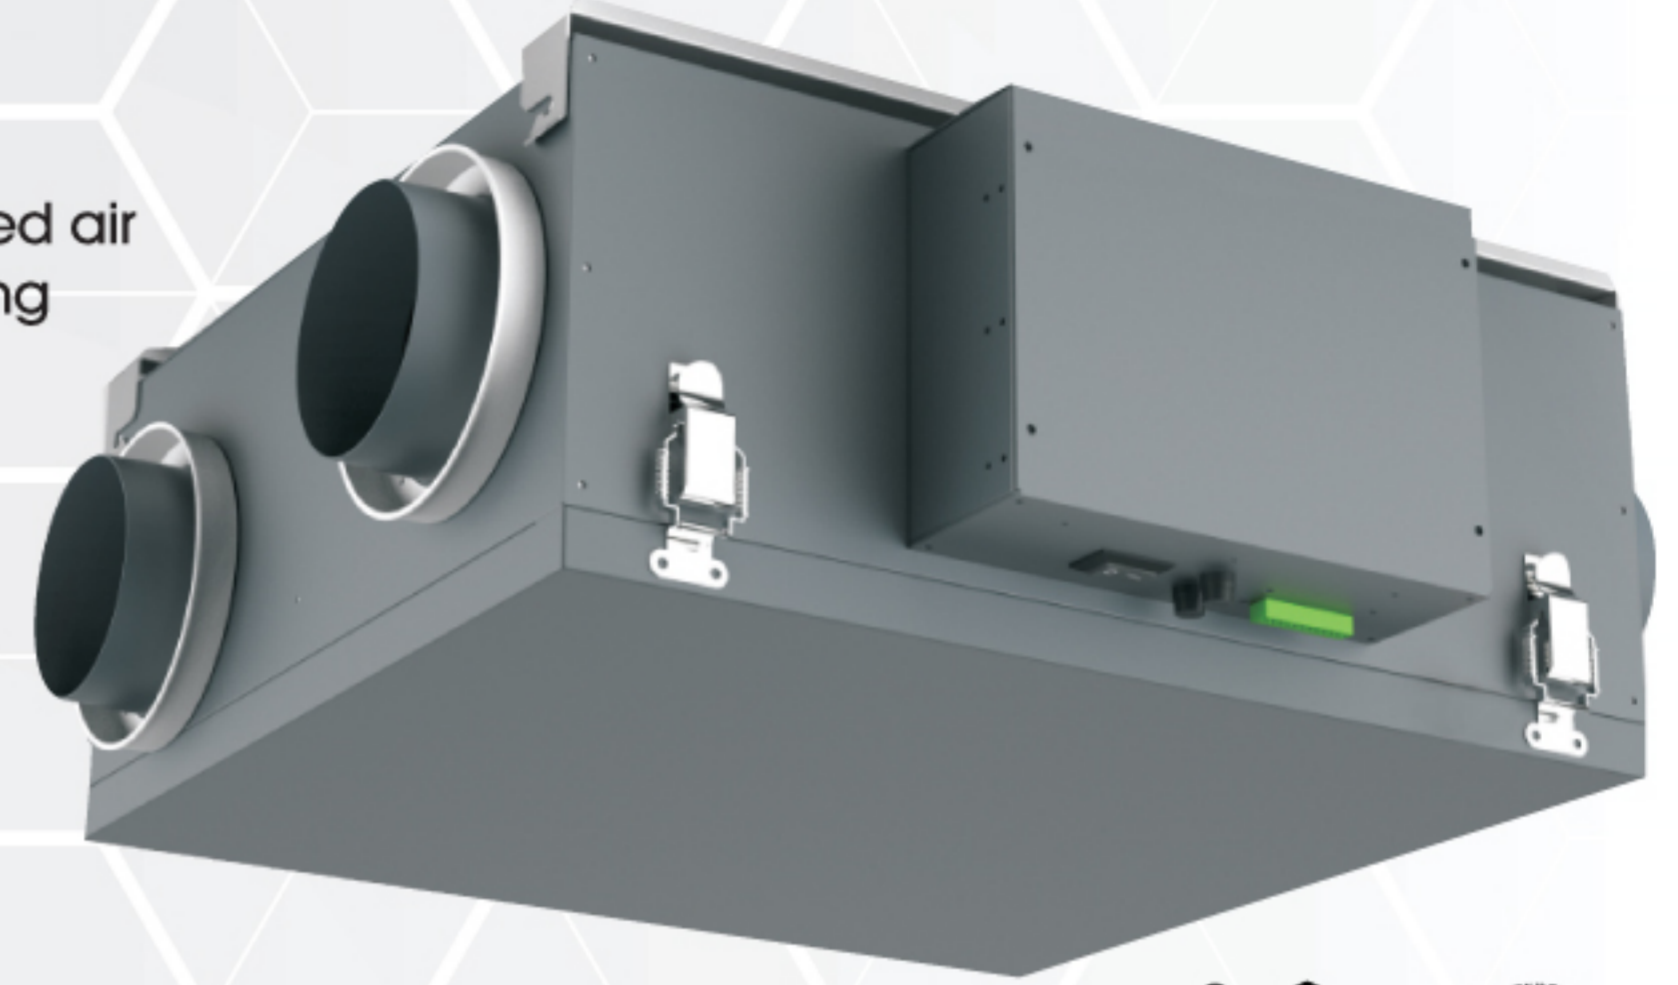

SPECIFICATIONS

FEATURES	
Duct Size	5"
Voltage	120V/60Hz
Wattage	165W
Amp	2.16A
Airflow	148CFM@0.35"wg
Fans	2 EC centrifugal fans

ENERGY RECOVERY CORE


Graphene Modified Polymer Membrane Energy Recovery Core covered by a limited lifetime warranty. Core dimensions are 11 13/16 x 11 13/16 inches with a 7 1/4 inches depth.

DEFROST

The freeze protection function prevents freezing of the energy recovery core in the cold season. This function is activated automatically and cannot be turned on or off. The ventilation unit periodically switches from rated operation mode to the special defrost mode (the extract fan runs in high speed, the supply fan is off) and vice versa according to the signaling from the outdoor temperature sensor. The temperature conditions for this mode are described in the table below:

Outside Temperature		Defrost Cycle min./ Operating min.
°C	°F	
Warmer Than -5	Warmer Than 23	No Defrost
-5 To -15	23 To 5	10/30
-15 To -27	5 To -17	10/20
-27 And Less	-17 And Less	10/15

DIMENSIONS

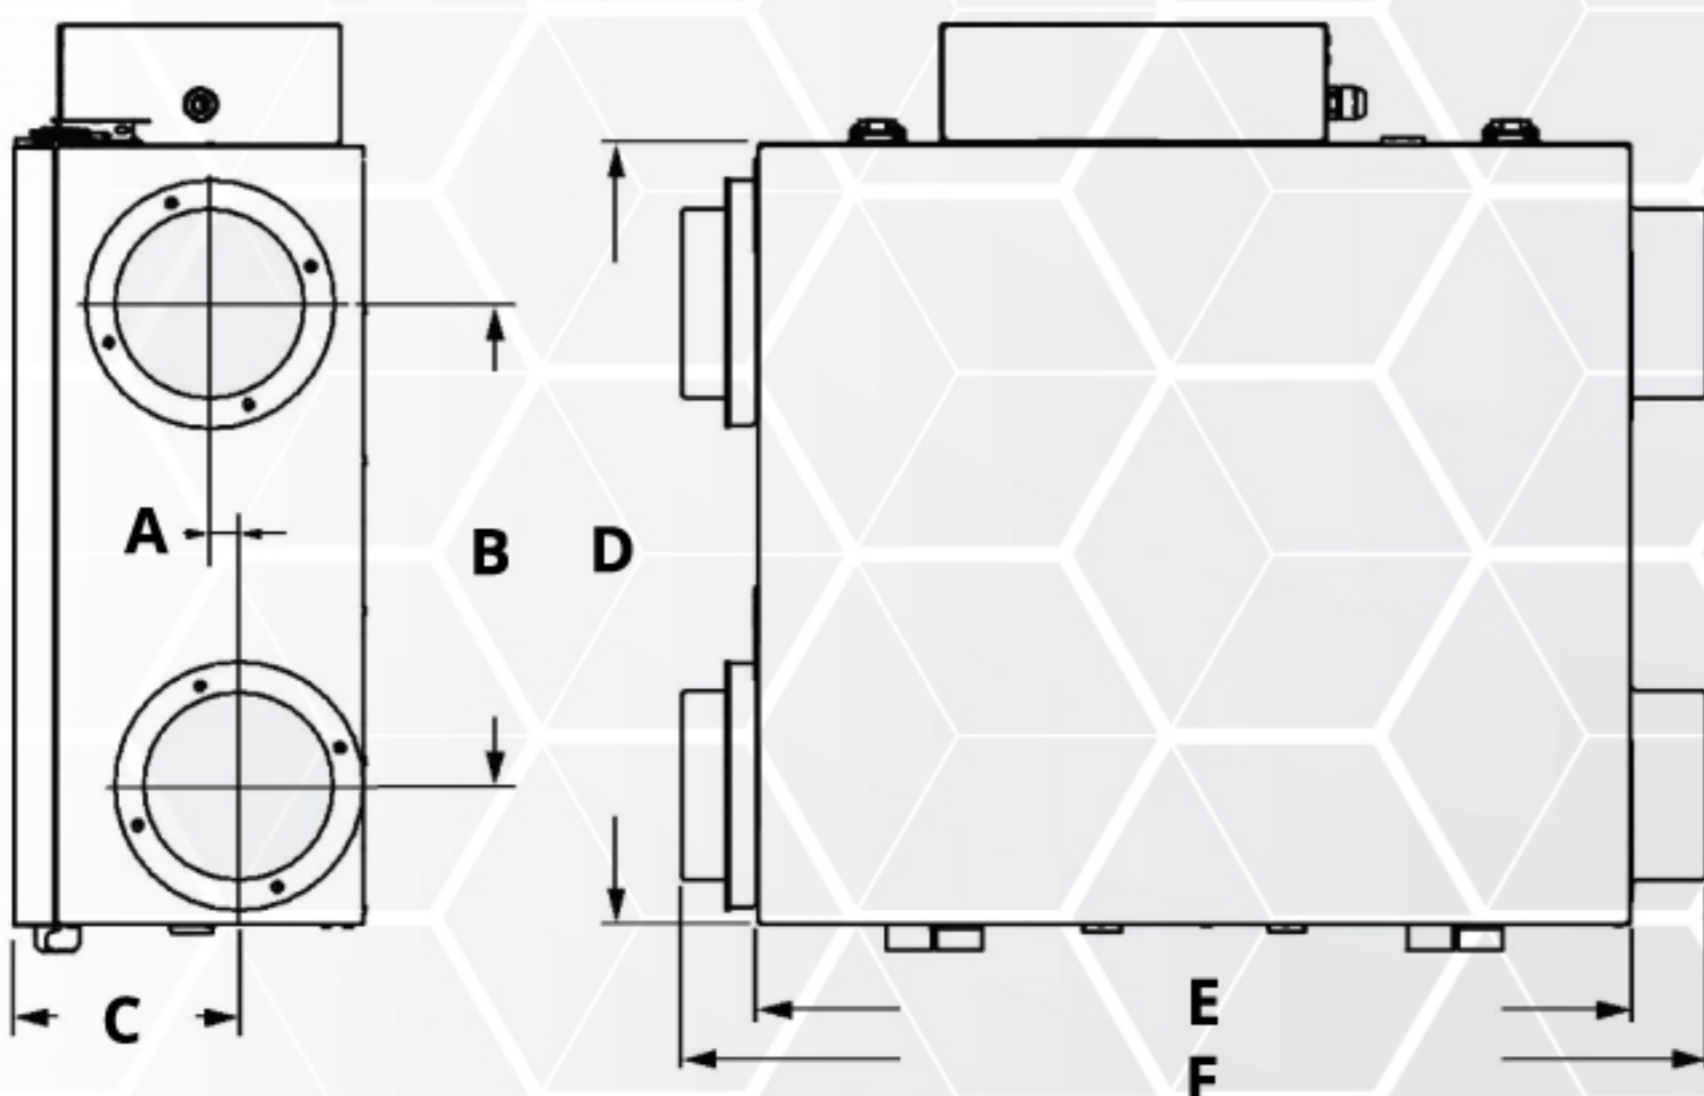


- A 3/4" (19 mm)
- B 12-3/8" (315 mm)
- C 5-13/16" (147 mm)
- D 20-1/16" (510 mm)
- E 22-7/16" (570 mm)
- F 26-3/8" (670 mm)
- G Ø 4-7/8" (124 mm)
- H 1-1/8" (29 mm)
- I 9-1/16" (230 mm)
- J 3-15/16" (100 mm)
- K 12-5/8" (320 mm)
- L 3-9/16" (91 mm)
- M 23-1/4" (590 mm)

*not tested under controlled environment

ENERGY RECOVERY VENTILATOR


ODD-ERV-150

AIRFLOW

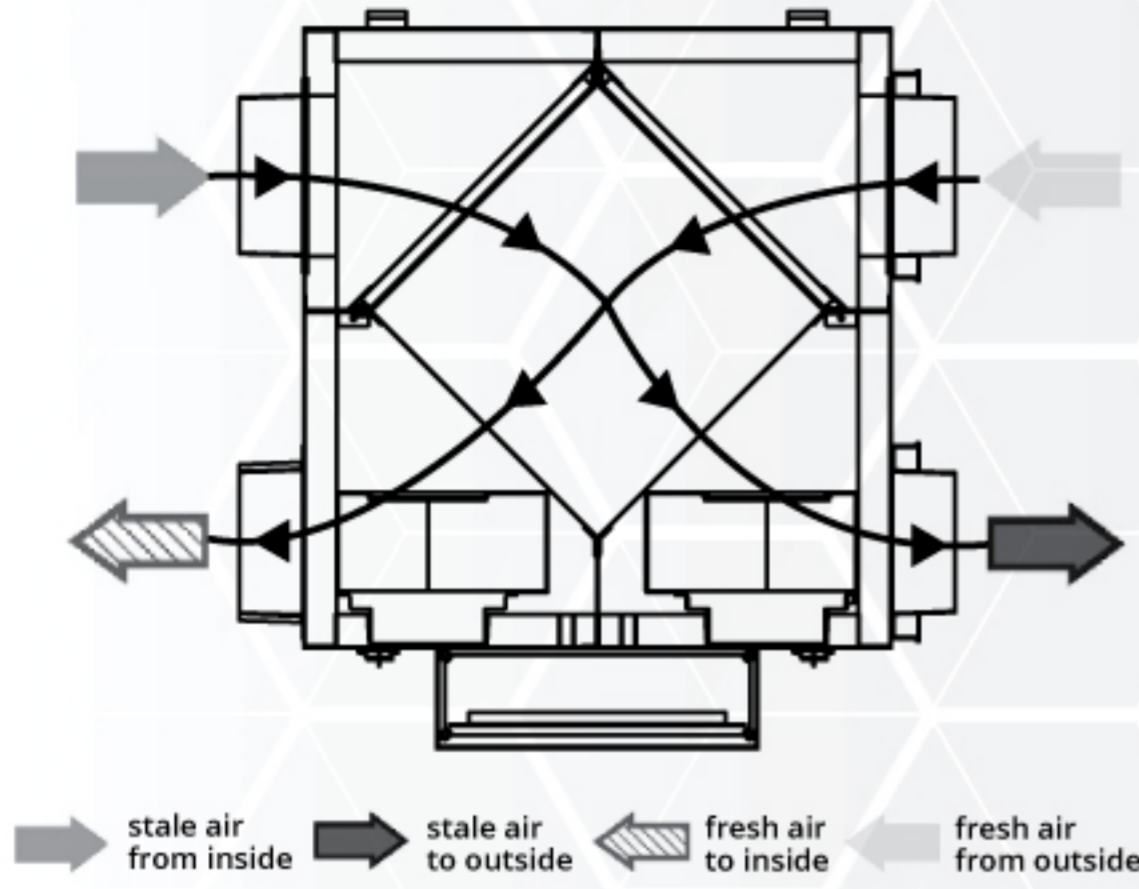

EXHAUST CFM	SUPPLY CFM	IN WG
155	157	0.10
151	155	0.20
147	152	0.30
144	149	0.40
141	147	0.50
138	144	0.60
135	142	0.70
133	140	0.80
128	135	1.00
124	131	1.20
115	122	1.60
103	110	2.00

FAN CURVE

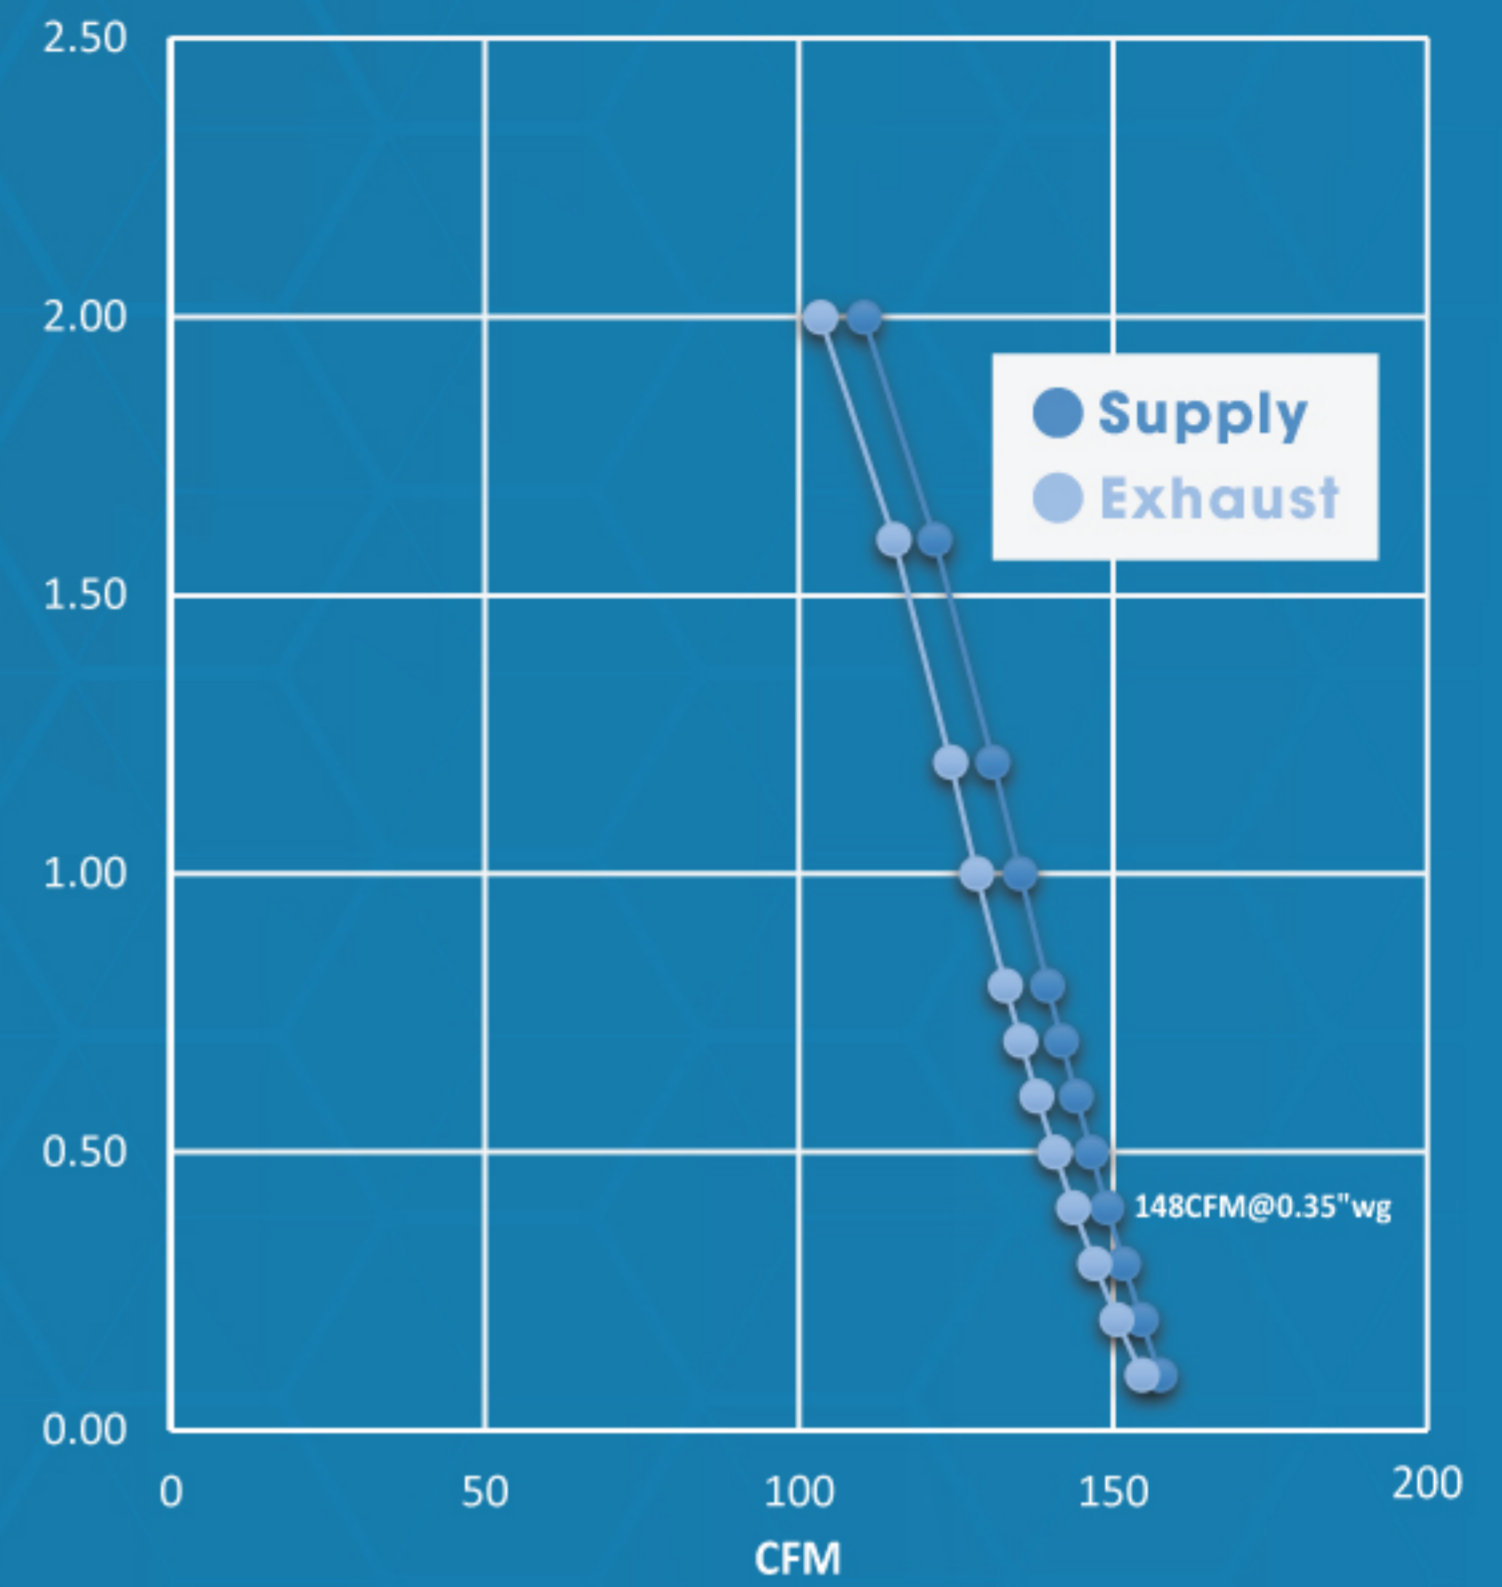

ENERGY PERFORMANCE

HEATING	SUPPLY TEMP.	NET AIRFLOW	AVERAGE POWER	SENSIBLE RECOVERY EFFICIENCY	ADJUSTED SENSIBLE RECOVERY EFFICIENCY <small>(this data is not HVI certified)</small>	APPARENT SENSIBLE EFFECTIVENESS	NET MOISTURE TRANSFER
i	0°C / 32°F	68.4cfm	27W	71	74	76.6	0.60
ii	0°C / 32°F	100.8cfm	56W	66	70	72.4	0.55
iii	0°C / 32°F	148.7cfm	157W	61	68	70.0	0.49
iv*	0°C / 32°F	55cfm	-	75	80	82.0	-

COOLING	SUPPLY TEMP.	NET AIRFLOW	AVERAGE POWER	SENSIBLE RECOVERY EFFICIENCY	ADJUSTED SENSIBLE RECOVERY EFFICIENCY <small>(this data is not HVI certified)</small>	APPARENT SENSIBLE EFFECTIVENESS	NET MOISTURE TRANSFER
i	35°C / 95°F	67.8cfm	28W	62	64	71.4	0.62

ACCESSORIES (sold separately)



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

*data based on linear Interpolation