

MODEL OD45-9005 OD45-11011

Ultra Silent, High Performance, Attractive Design Grille

Description

Ventilating fan should be ceiling or wall mounted and capable of exhausting air quietly and efficiently.

It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It holds an ETL evaluation and conforms to UL and cUL safety standards.

Housing

Made of rugged 26 GA galvanized steel

Detachable 6 inch plastic collar which includes a light weight built in back draft damper.

Double hanger bar mounting brackets that are adjustable up to 24 inch span allows for ideal positioning.

Motor/Blower

Plug in permanently lubricated motor- Engineered for continuous operation.

The motor is energy efficient and has continuous duty operation.

Power rating should be 120 volts and 60 Hz

Fan shall be ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit. Motor comes with a built in overload disconnect for safety and longer motor life.

Our Premium series operates at lower RPM's to give you quieter operation.

Grille

The Premium grille is low profile that has elegance and still able to maintain its simplicity.

Made of a rugged polymeric resin that's known for its long life durability.

Comes with torsion spring clips that helps mount grille evenly.

Typical specification

Ceiling ventilator shall have corrosion resistance galvanized steel housing with 4 point mounting capability.

It shall be ducted to a roof vent or wall cap using 4 inch round pipe.

Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.

Includes an attachable non metallic collar with build in back draft damper.

Ortech's Premium ventilators come with permanent split capacitor motor which improves efficiency.



Options

- Flourescent light
- Humidistat
- Motion Sensor
- Speed controller
- Metal Grille




Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS




MODEL OD45-9005 OD45-11011

Model Number	OD45-9005		OD45-11011		OD45-9005		OD45-11011	
Static Pressure in inches w.g.	0.1		0.1		0.25		0.25	
Air Volume (CFM)	90	45	110	45	67	15	100	15
Noise (sones)	0.5	0.4	1.1	0.4	N/A	N/A	N/A	N/A
Fan Watts	25W	16W	30W	16W	23W	14W	29W	14W
Duct Diameter	6"							
Power Rating(V/Hz)	120/60							

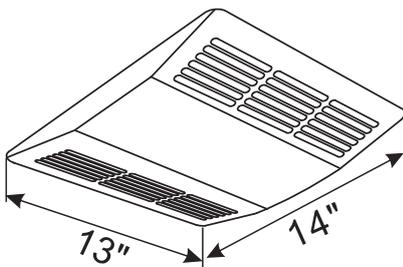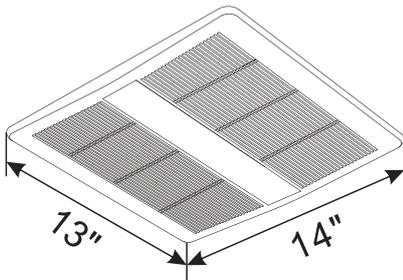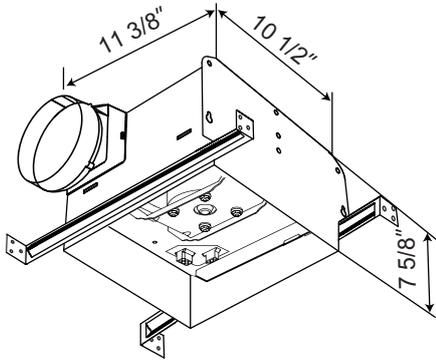

OPTIONAL METAL GRILLE

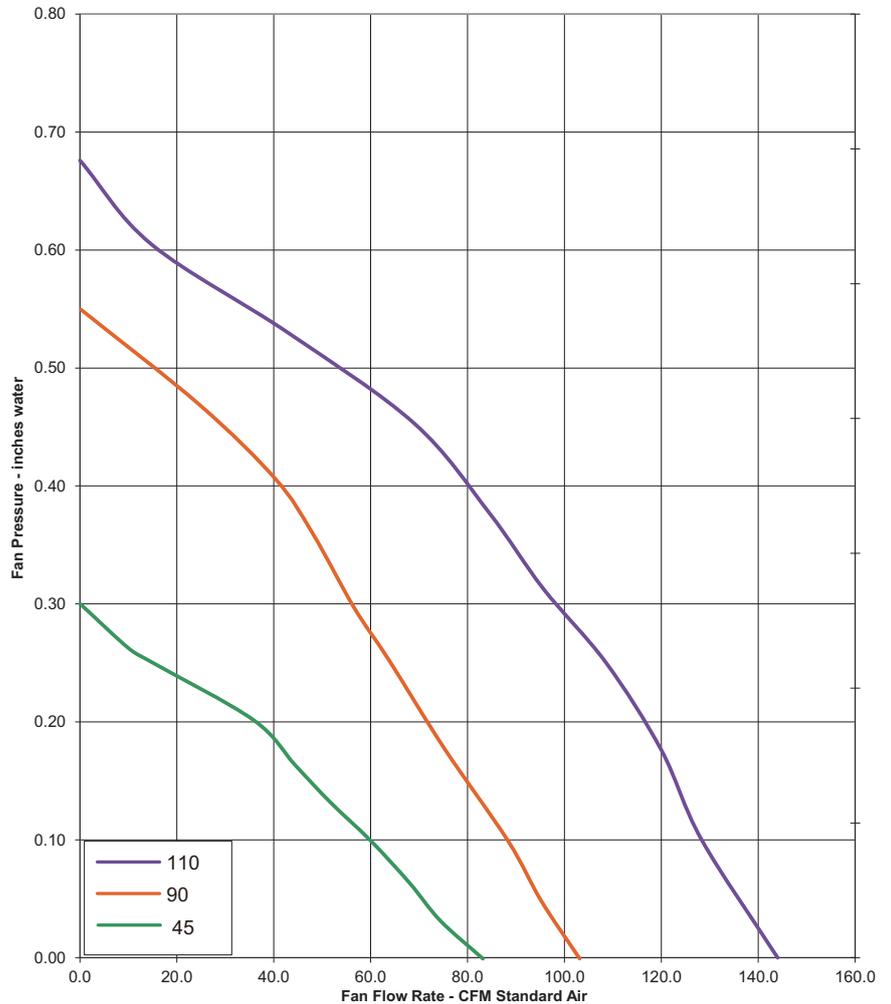

ORTECH INDUSTRIES INC.

604-543-6473-TEL-1-888-543-6473

604-599-6201-FAX-1-888-541-6474

33-13290 78 AVE

SURREY, BC V3W OH6

CANADA

www.ortechlighting.com

CERTIFICATIONS

